



EVOLUTION IS NOW !



CONTACT US

STEIEL Elettronica Srl

 Viale Europa, 24
35020 Ponte San Nicolò (PD) - Italy

 +39 049 8961488

 info@steiel.it

 www.steiel.it

  Follow us!



www.steiel.it

EVOLUTION Instruments

The New Measurement Line



EVOLUTION EW & EVOLUTION EW² Series

Single Channel

Dual Channel



User-friendly interface featuring an intuitive configuration menu with four multifunction soft keys

100-240 V~


Multi-voltage power supply, also available in 24 V/~ version



Three-level configuration menu, protected by **three-level password**



Large display with RGB backlight



Easily accessible **USB port** for system upgrading and data downloading, protected by a watertight cover



Internal RTC for time schedule setting and date/time labelling of data



TCP/IP

RS485 serial port with Modbus RTU communication protocol (standard) or TCP/IP (optional)



Optional connectivity with **SteieLynx smart web app** by STEIEL

IP65

Watertight housing, suitable for harsh environments

Measurement input(s) for pH electrode, ORP electrode, conductivity probe, amperometric sensor, turbidity cell, or 4-20 mA signal

Each measurement channel is provided with two adjustment outputs, one analogic output, and two level inputs, with a **full set of configuration options**

Optional PID regulation

Extremely easy to install and set-up

EVOLUTION EQ - Panel mounting, single-channel line.
Models with pH/ORP, conductivity, or 4-20 mA measurement input.
Provided with two adjustment outputs and one analogic output.



100-240 V~




IP65



easy+fix The Easiest Installation

STEIEL exclusive, patented system for **compact and space-saving assembly** of the sensor-holder, directly fixed on the instrument housing.

Maximum **installation flexibility!** You can mount the sensor-holder on **both sides** of the instrument.

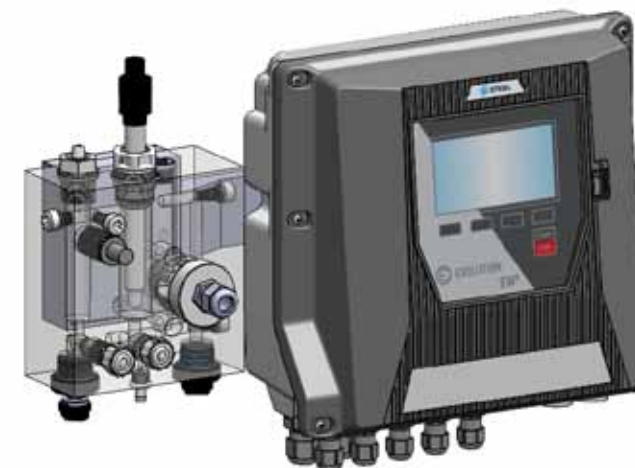

Symmetrical fixing plate. **Left or right?**
You choose the best side for your installation needs!

