


General Description

Our Activated Carbon Filter Cartridge are formed using extruding carbon fines and food-grade binders. This makes it FDA approved for the Food/Beverage industry. It also ensures that no bad taste is left behind. This filter is also great for filtering organic matter effectively.

Applications

- Drinking water treatment
- Plating
- Food industry
- Industrial water treatment

Flow Rate-Adsorption rate charter

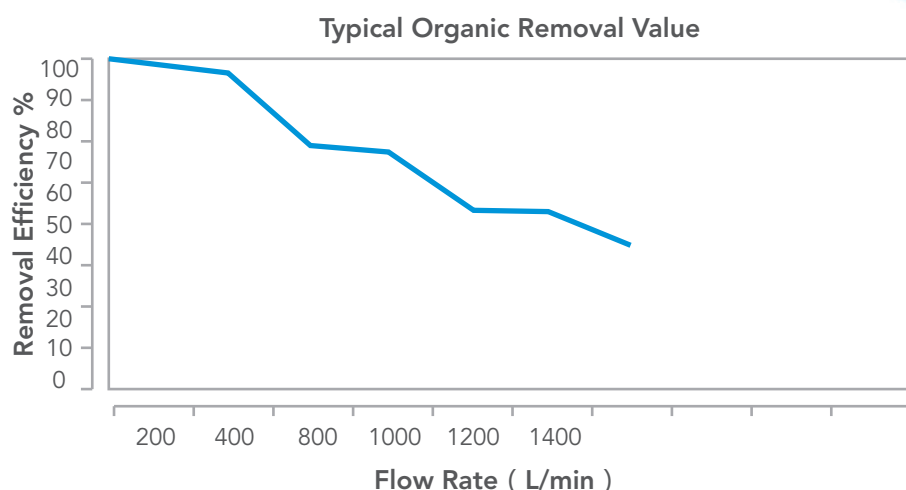

Specifications

Dimensions: Outside Diameter: 20mm, 50mm, 65mm, 68mm, 115mm
 Inside diameter: 28mm, 30mm
 Length: 9.75", 9.87", 10", 20", or up to customers' requirements

Material of Constructions: Filter media: acid washed bituminous GAC & water washed coconut shell GAC
 End cap: PP
 Gasket: Silicone, EPDM, NBR
 Netting: Polyethylene

Performance: Removal Rating: 5µm, 10µm
 Maximum operating temperature: 52°C
 Maximum operating pressure: 10 Bar
 Maximum differential pressure: 7 Bar at 20°C

Part Numbers/Ordering Information

Activated Carbon Filter Cartridge P/N:DLCTO-&-*=-●(e.g., DLCTO-50-5-10-A)

