


| TYPE  | BOILER<br>CAP.<br>KW | H.S.<br>m2 | WEIGHT<br>KG | A    | B    | C    | E    | F    | H    | J   | K   | L    | M   |
|-------|----------------------|------------|--------------|------|------|------|------|------|------|-----|-----|------|-----|
| L 06C | 600                  | 56         | 544          | 710  | 460  | 765  | 1326 | 985  | 2045 | 286 | 214 | 855  | 177 |
| L 12C | 1200                 | 99         | 663          | 810  | 576  | 881  | 1381 | 1085 | 2045 | 286 | 214 | 855  | 235 |
| L 18C | 1800                 | 141        | 798          | 1110 | 576  | 881  | 1474 | 1385 | 2045 | 373 | 264 | 905  | 235 |
| L 24C | 2400                 | 188        | 909          | 1110 | 692  | 997  | 1471 | 1385 | 2045 | 373 | 264 | 905  | 293 |
| L 30C | 3000                 | 235        | 1056         | 1110 | 827  | 1132 | 1526 | 1385 | 2095 | 373 | 314 | 955  | 351 |
| L 36C | 3600                 | 283        | 1180         | 1310 | 827  | 1132 | 1626 | 1585 | 2095 | 480 | 314 | 955  | 351 |
| L 42C | 4200                 | 339        | 1351         | 1310 | 983  | 1288 | 1681 | 1585 | 2145 | 480 | 364 | 1005 | 409 |
| L 48C | 4800                 | 367        | 1416         | 1310 | 1041 | 1346 | 1681 | 1585 | 2145 | 480 | 364 | 1005 | 438 |
| L 60C | 6000                 | 452        | 1634         | 1310 | 1235 | 1540 | 1671 | 1585 | 2195 | 420 | 414 | 1055 | 525 |
| L 72C | 7200                 | 528        | 1805         | 1510 | 1235 | 1540 | 1671 | 1785 | 2195 | 420 | 414 | 1055 | 525 |
| L 84C | 8400                 | 660        | 2117         | 1510 | 1492 | 1797 | 1651 | 1785 | 2195 | 420 | 399 | 1040 | 641 |
| L 96C | 9600                 | 707        | 2264         | 1610 | 1492 | 1797 | 1821 | 1885 | 2230 | 535 | 449 | 1090 | 641 |
| L108C | 10800                | 778        | 2434         | 1610 | 1668 | 1973 | 1816 | 1885 | 2230 | 535 | 449 | 1090 | 696 |
| L120C | 12000                | 934        | 2780         | 1910 | 1668 | 1973 | 1821 | 2185 | 2230 | 535 | 449 | 1090 | 696 |
| L140C | 14000                | 1060       | 3184         | 1910 | 1842 | 2147 | 1871 | 2185 | 2280 | 535 | 499 | 1140 | 783 |



| TYPE  | D    | G   | N     | P       |
|-------|------|-----|-------|---------|
| L 06C | 400  | 200 | DN065 | 3/4"    |
| L 12C | 400  | 300 | DN065 | 3/4"    |
| L 18C | 500  | 350 | DN080 | 3/4"    |
| L 24C | 500  | 450 | DN080 | 1"      |
| L 30C | 600  | 450 | DN100 | 1"      |
| L 36C | 600  | 500 | DN100 | 1"      |
| L 42C | 700  | 550 | DN100 | 2x1"    |
| L 48C | 700  | 600 | DN100 | 2x1"    |
| L 60C | 800  | 650 | DN125 | 2x1"    |
| L 72C | 800  | 700 | DN125 | 2x1"    |
| L 84C | 800  | 700 | DN150 | 2x1.25" |
| L 96C | 900  | 800 | DN150 | 2x1.25" |
| L108C | 900  | 850 | DN150 | 2x1.25" |
| L120C | 900  | 950 | DN150 | 2x1.25" |
| L140C | 1000 | 950 | DN150 | 4x1"    |

Flange connections acc. DIN 2631

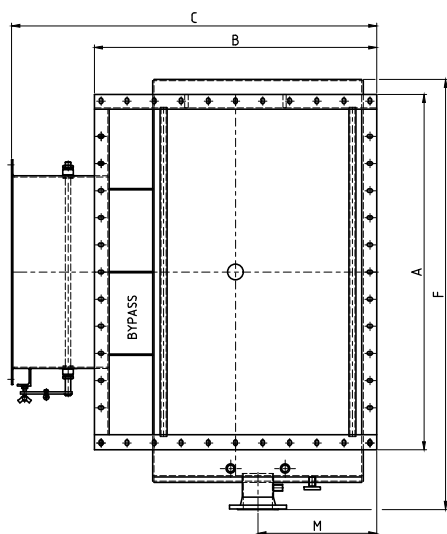