




FLOW EQUIPMENT

致力于供排水设施的设计/制造/销售以及售后服务

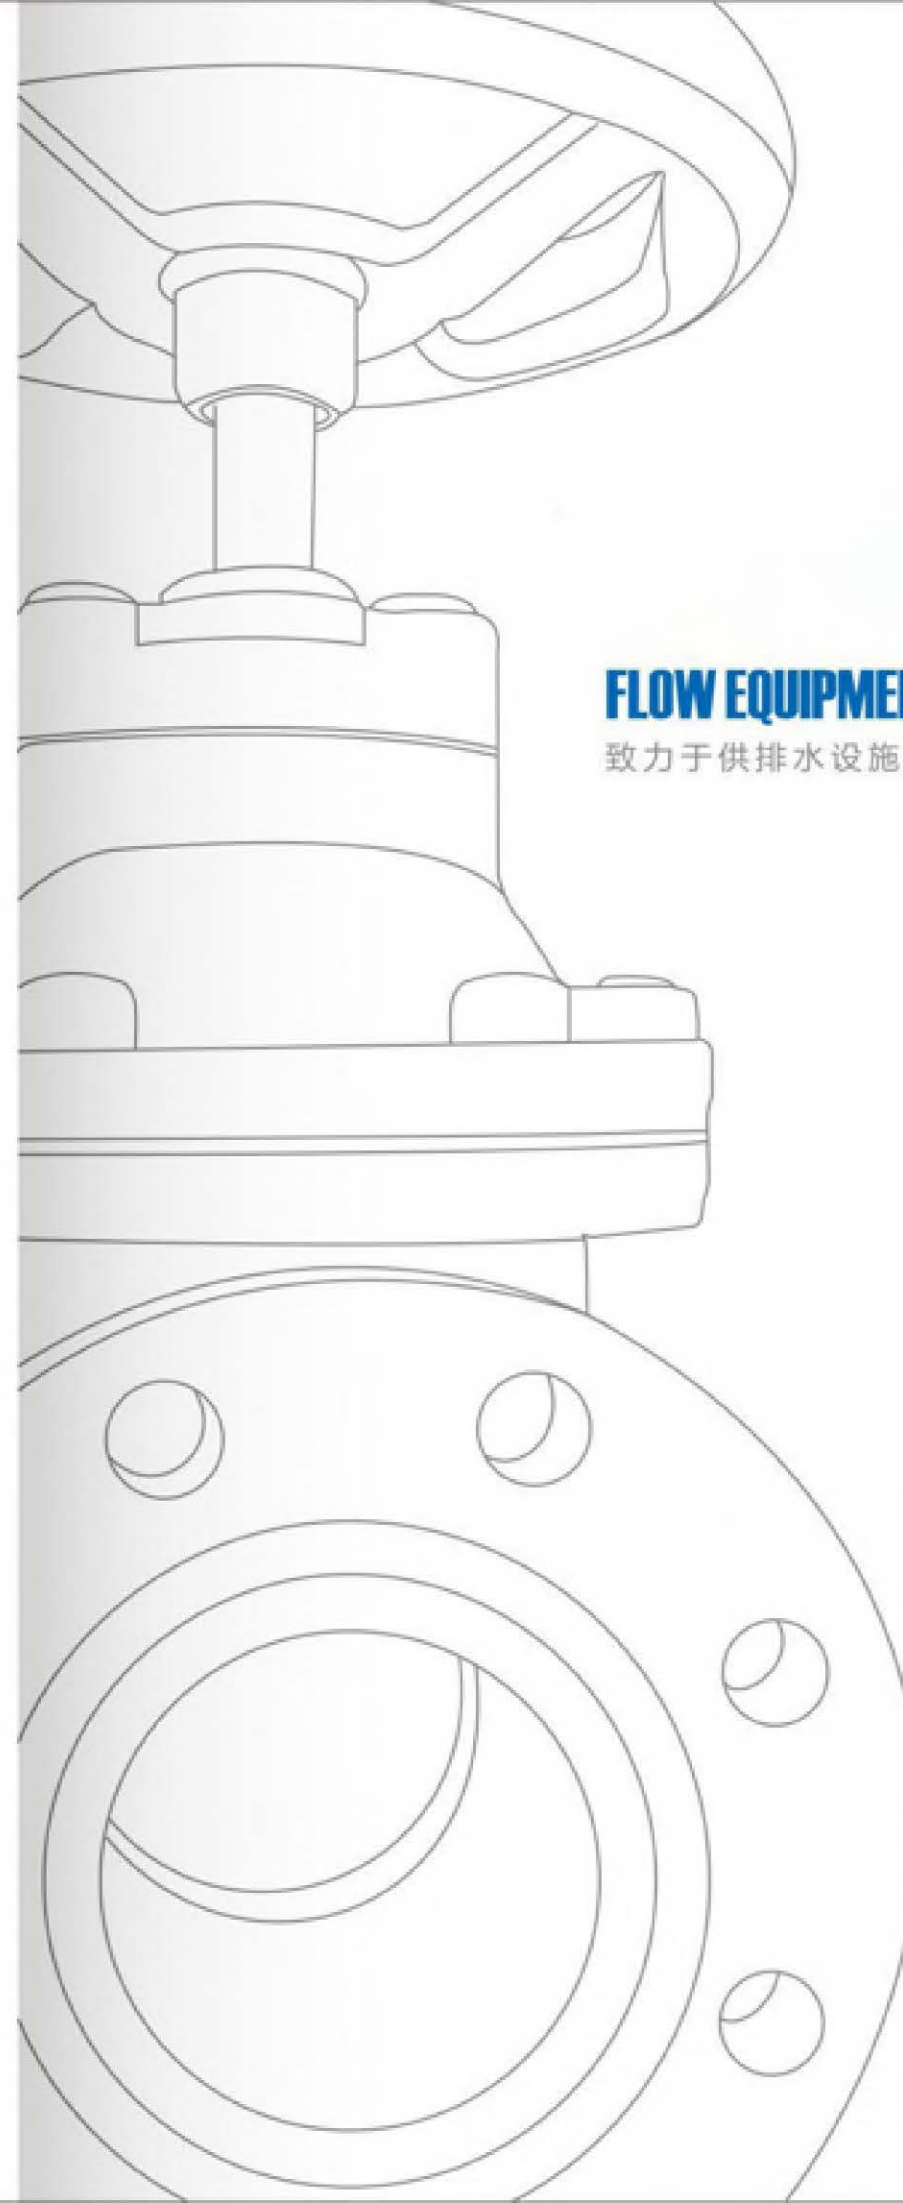

VALVES FOR WATER MANAGEMENT 阀门类

高速双孔排气阀
Hivent Double Orifice Air
Release & Vacuum Valve
DN50-DN200
PN16
标准/standard: EN1074-4



英标软密封闸阀
Resilient Seated Sluice Gate
Valve BS5163
DN50-DN600
PN10&PN16
标准/standard: BS5163



德标软密封闸阀
Resilient Seated Sluice / Gate
Valve DIN3352 F4/F5
DN50-DN600
PN10&PN16
标准/standard: DIN3352 F4/F5



Y型过滤器
Y Strainer
DN15-DN500
PN16
标准/standard: DIN3352



止回阀
Check Valve
DN50-DN300
PN10&PN16
标准/standard: GB12236



蝶阀
Double Eccentric Center
Butterfly Valve
DN300-DN2000
PN10&PN16
标准/standard: BS5155



组合式阀门
Combined Valve
DN80-DN300
PN10&PN16

REPAIR CLAMPS & UNIVERSAL JOINTS 修补器类&接头类



铸铁修补器
Ductile Iron Repair Clamp
DN50-DN300
PN10&PN16



螺纹孔铸铁修补器
Ductile Iron Bossed Repair Clamp
DN50-DN300
PN10&PN16



承口修补器
C/Quick-Cut Encapsulation Clamp
DN50-DN200
PN10&PN16



**不锈钢&球墨铸铁
双卡管道修补器**
Stainless Steel/Ductile Iron Double
Band Repair Clamp
(88-110)-(410-430) PN10&PN16



全法兰可拆卸接头/伸缩接头
All Flange Dismantling Joint
DN50-DN1200
PN10&PN16



双法兰可拆卸接头/伸缩接头
Double Flange Dismantling Joint
DN80-DN1200
PN10&PN16



不锈钢单卡管道修补器
Stainless Steel Single Band Repair Clamp
(87-96)-(350-360)
PN10&PN16



不锈钢双卡管道修补器
Stainless Steel Double Band Repair Clamp
(88-110)-(410-430)
PN10&PN16



**不锈钢&球墨铸铁
单卡管道修补器**
Stainless Steel/Ductile Iron Single
Band Repair Clamp
(87-96)-(350-360) PN10&PN16



PE管道用柔性接头
PE Restraint Coupling
DN50-DN300
PN16



广范围单法兰接头
Universal Flange Adaptor
DN50-DN700
PN10&PN16



广范围柔性接头
Universal Straight Coupling
DN50-DN700
PN10&PN16



广范围变径柔性接头
Universal Stepped Coupling
(DN50-80)-(DN250-300)
PN10&PN16



PE单法兰接头
PE Restraint Flange Adaptor
DN50-DN300
PN16

MOPVC PIPE FITTINGS MOPVC 管道用管件



盘承管
MOPVC Flanged Socket
Dn40-DN400
PN16



双承口弯管
MOPVC Double Socket Bend
11.25°, 22.5°, 45°, 90°
OD50-OD355
PN16



全承口三通
MOPVC All Socket Tee
OD50-OD400
PN16



双承口带单支盘三通
MOPVC Double Socket Tee With Flanged Branch
OD50-OD500
PN16



承口管堵
MOPVC End Cap
OD50-OD315
PN16



全承四通
MOPVC Socket Cross
OD75-OD315
PN16

**DUCTILE IRON PIPE
FITTINGS & FLANGES**
球墨铸铁管件类&法兰盘



DUCTILE IRON PIPES & MANHOLE COVERS

球墨铸铁管&井盖



球墨铸铁雨水篦子
Ductile Iron Rain Water Crates



双锁井盖
Double Lock Manhole Cover



井盖850×850
Manhole Cover 850×850



井盖
Manhole Cover



球墨铸铁管
Ductile Iron Pipes

PROJECT CASE

工程案例





高速双孔排气阀

HIVENT DOUBLE ORIFICE AIR RELEASE & VACUUM VALVE

技术参数 SPECIFICATION

- 1 规格/DN: DN50-DN200
- 2 执行标准/Design standard: EN1074-4
- 3 工作压力/PN: 0.2-16bar
- 4 法兰连接方式/End flange: BS4504/GB/T17241.6
- 5 测试标准/Test: GB/T13927
- 6 适用介质/Applicable medium water, 水
- 7 适用介质温度/Temperature range: 0-80°C



功能和特点 FUNCTION & FEATURES

高速双孔排气阀是把大孔高速排气阀和小孔微量排气阀结合为一体, 适应于给排水管道, 具有进排气两功能的组合型阀门。当管道冲水时能自动高速排出管内的气体; 当管道产生负压时, 能自动快速补充管内需要的气体。水进入排气阀, 管道内气体被排出, 浮球在水的浮力作用下上升, 浮球上升至上密封面, 两密封副密封。当管道产生负压时, 水面就会下降, 浮球也随之离开密封面, 将空气进入管内。


当管道在正常工作运行中, 由于水流动析出的气体, 聚集在排气阀腔内, 形成气体带, 使水位下降, 杠杆浮球自动灵敏的打开小排气孔, 释放气体。反之, 排出气体, 水面上升, 杠杆浮球上升密封小排气孔。本阀除具有自动进排气功能外, 还能在带压输水, 具有消除停泵水锤 (先产生负压后产生正压) 的功能, 并能对管道大破坏力的拉断水柱水锤, 具有更好的消除水锤功能。

HiVent double orifice air Release&Vacuum valve that combines both large orifice & small orifice functions within one unit. The large orifice allows air to be expelled from the system during filling of a pipeline and admit air back into the system whenever sub-atmospheric pressure occurs. Air is vented from the system until water enters the valve and lifts the float against its seat, ensuring a tight seal. In the event of sub-atmospheric pressure in the system, the water level drops causing the float to fall from its seat and allow the admission of air.

During normal working of the main the small orifice releases the air which accumulates under pressure. With the main in operation, the float is normally against its seat. As air enters the chamber body the water level is depressed until a level is reached when the float drops from its seat, which allows air to escape. The consequent rise in water level returns the float to its seat.

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	阀体/Body	球墨铸铁/Ductile Iron: ENGJS-500-7
2	阀盖/Cover	球墨铸铁/Ductile Iron: ENGJS-500-7
3	护盖/Shield Plate	球墨铸铁/Ductile Iron: ENGJS-500-7
4	大孔密封圈/Large Orifice Seat	EPDM
5	大孔浮球/Large Orifice Float	ABS塑料/ABS plastic
6	小孔浮球/Small Orifice Float	ABS塑料/ABS plastic
7	节流塞/Orifice Plug	玻璃纤维尼龙6/Glass filled nylon 6
8	螺母/Orifice Nut	玻璃纤维尼龙6/Glass filled nylon 6
9	销轴/Hinge Pin	SS316
10	止动螺栓/Stop Screw	SS316
11	小孔密封圈/Small Orifice Seal	EPDM
12	O型圈/Chamber O-ring	EPDM
13	橡胶垫/Gasket, Orifice Plug	EPDM
14	螺栓和螺母/Shield Studs & Nuts	SS304
15	螺栓和螺母/Cover Bolts & Nuts	SS304
16	压盖螺栓/Chamber Setscrews	SS304
17	小孔微量排气阀体/Chamber	球墨铸铁/Ductile Iron: ENGJS-500-7

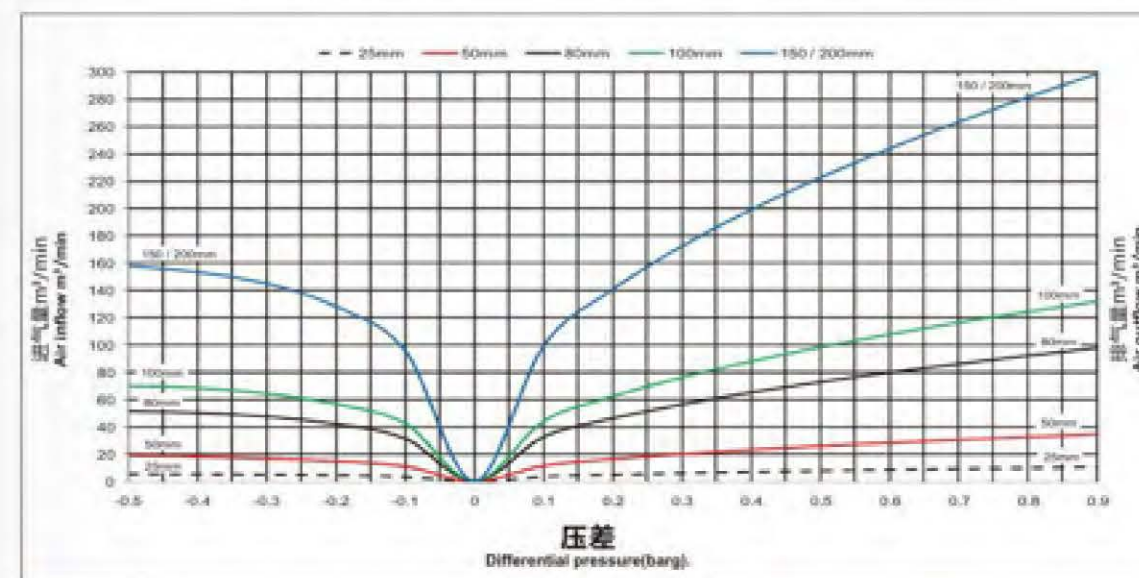

阀门尺寸	A	B	C	E	排气孔	单重	适用管道最大尺寸
Valve size	mm	mm	mm	mm	Outlet (mm)	Weight(kg)	Max main diameter to be used with
50	260	162	50	203	50	18	450mm
80	260	162	80	203	50	20	450mm
80	365	229	80	228	80	30	700mm
100	437	266	100	246	100	36	900mm
150	525	440	150	290	150	66	1200mm
200	535	440	200	290	150	76	1200mm




BS5163软密封闸阀

BS5163 RESILIENT SEATED SLUICE/GATE VALVE

技术参数 SPECIFICATION

- 1 规格/DN: DN50-DN600
- 2 工作压力/PN: PN10/PN16
- 3 设计标准/Design standard: BS5163
- 4 结构长度/Face to face length: BS5163/BS EN 558-1
- 5 法兰标准/End flang: BS4504/BS EN 1092-2 · GB/17241.6 ISO7005.2
- 6 测试标准/Test: BS EN 1074-1-2 · GB/T 13927
- 7 适用介质温度/Applicable Temps: ≤ 80℃

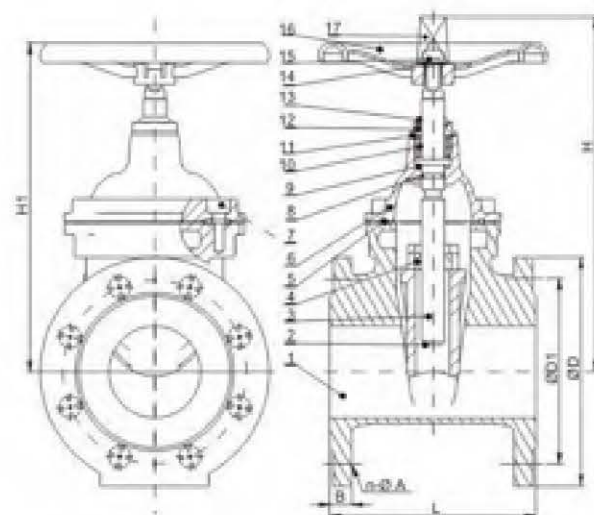

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	阀体/Body	球墨铸铁/BS EN 1563 EN-GJS-450-10
2	闸板/Disc	球墨铸铁/BS EN 1563 EN-GJS-450-10
3	阀杆/Stem	SS420
4	螺母/Disc Nut	黄铜/Brass
5	阀盖垫片/Bonnet Gasket	EPDM
6	阀盖/Bonnet	球墨铸铁/BS EN 1563 EN-GJS-450-10
7	螺栓/Bolt	碳钢镀锌/Carbon Steel With Zinc Coating
8	O型圈/O-Ring	EPDM
9	止退环/Thrust Ring	黄铜/Brass
10	O型圈/O-Ring	EPDM
11	O型圈/O-Ring	EPDM
12	密封套/Bushing	黄铜/Brass
13	防尘圈/Bust Proof Ring	EPDM
14	垫圈/Washer	碳钢镀锌/Carbon Steel With Zinc Coating
15	螺栓/Bolt	碳钢镀锌/Carbon Steel With Zinc Coating
16	手轮/Hand Wheel	球墨铸铁/BS EN 1563 EN-GJS-450-10
17	方帽/Stem Cap	球墨铸铁/BS EN 1563 EN-GJS-450-10

规格DIMENSIONS(PN10)

DN	L	OD	OD1	H	H1	B	N-ØA	螺栓尺寸 SIZE OF BOLT	重量 WEIGHT
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(KG)
50	178	165	125	318	268	19	4-Ø19	M16	11
80	203	200	160	380	330	19	8-Ø19	M16	16
100	229	220	180	430	380	19	8-Ø19	M16	23
150	267	285	240	543	493	19	8-Ø23	M20	41
200	292	340	295	630	580	20	8-Ø23	M20	60
250	330	395	350	805	755	22	12-Ø23	M20	97
300	356	445	400	818	768	24.5	12-Ø23	M20	134
350	381	505	460	816	770	24.5	16-Ø23	M20	194
400	406	565	515	1049	999	24.5	16-Ø28	M24	239
450	432	615	565	1008	943	25	20-Ø28	M24	310
500	457	670	620	1257	1207	26.5	20-Ø28	M24	409
600	508	780	725	1405	1355	30	20-Ø31	M27	624

规格DIMENSIONS(PN16)

DN	L	OD	OD1	H	H1	B	N-ØA	螺栓尺寸 SIZE OF BOLT	重量 WEIGHT
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(KG)
50	178	165	125	318	268	19	4-Ø19	M16	11
80	203	200	160	380	330	19	8-Ø19	M16	16
100	229	220	180	430	380	19	8-Ø19	M16	23
150	267	285	240	543	493	19	8-Ø23	M20	42
200	292	340	295	630	580	20	12-Ø23	M20	62
250	330	405	355	805	755	22	12-Ø23	M24	99
300	356	460	410	818	768	24.5	12-Ø28	M24	140
350	381	520	470	816	770	26.5	16-Ø28	M24	198
400	406	580	525	1049	999	28	16-Ø31	M27	245
450	432	640	585	1008	943	30	20-Ø31	M27	315
500	457	715	650	1257	1207	31.5	20-Ø34	M30	415
600	508	840	770	1405	1355	36	20-Ø37	M33	630




组合式阀门

COMBINED VALVE

技术参数 SPECIFICATION

- 1 工作压力/PN: PN10/PN16
- 2 测试标准/Test: BSEN1074-1-2
- 3 适用介质温度/Applicable Temps: $\leq 80^{\circ}\text{C}$
- 4 钻孔标准/Drilling Spec: ISO7005.2 BSEN1092-2

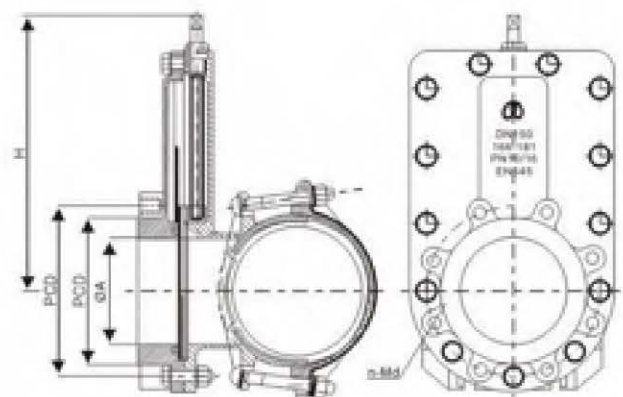

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	阀体/Body	BS EN1563 EN-GJS-450-10
2	闸板/Disc	SS420
3	阀杆/Stem	SS420
4	螺母/Stem nut	ZCuSn5Pb5Zn5
5	橡胶密封/Rubber seals	EPDM
6	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy
7	螺栓/Fasteners	不锈钢/8.8级碳钢镀达克罗/Stainless Steel/ Grade 8.8 with Dacromet Coating

功能和特点 FUNCTION & FEATURES

- 1.小巧轻便,密封性好,可永久密封。
 - 2.扭矩小,可便于开关。
 - 3.适用范围广,可用于各种类型管道。
 - 4.环氧树脂粉末涂层,通过WRAS认证。
 - 5.安装方式简单。
 - 6.可带压安装。
- 1.Small size & light-weight, reliable & permanent sealing.
- 2.Small torque of open & close.
- 3.Wide range of applicable pipeline.
- 4.FBE Coating outside and inside,through the WRAS certification.
- 5.No specialist installation equipment is required, simply a torque wrench to confirm correct bolt torque.
- 6.All size products can be installed underpressure.
- For further information please contact our Technical Department,appointed distributor or agent, who will be pleased to assist.

规格DIMENSIONS(PN16)

DN	范围 RANGE	PN	ØA	ØB	PCD	H	N-Md
DN80	90-103	PN10/16	80	132	160	286	8-M16
DN100	122-129	PN10/16	100	154	180	303	8-M16
DN150	166-181	PN10/16	150	207	240	388	8-M20
DN200	216-240	PN10	200	262	295	472	8-M20
DN200	216-240	PN16	200	262	295	472	12-M20
DN250	269-294	PN10	250	320	350	565	12-M20
DN250	269-294	PN16	250	320	355	565	12-M24
DN300	323-349	PN10	300	370	400	652	12-M20
DN300	323-349	PN16	300	370	410	652	12-M24




止回阀

CHECK VALVE

技术参数 SPECIFICATION

- 1 规格/DN: DN50-DN300
- 2 工作压力/PN: PN10/PN16
- 3 设计标准/Design standard: GB12236
- 4 结构长度/Face to face length: BS5163/BS EN 558-1 - GB12221
- 5 法兰标准/End flang: BS4504/BS EN 1092-2/GB(17241.6/ISO7005.2
- 6 测试标准/Test: BSEN1074-1-2 - GB/T13927
- 7 适用介质温度/Applicable Temps: 0-80°C

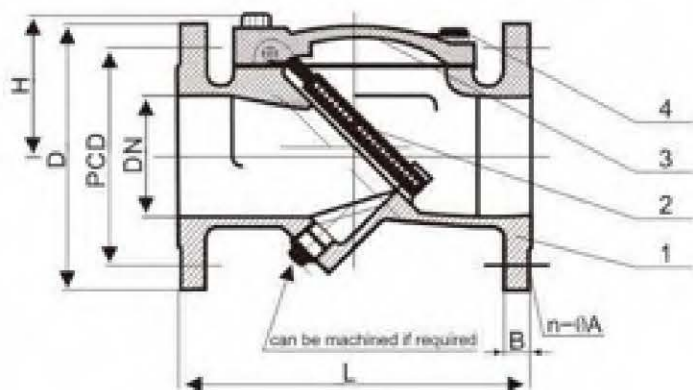

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	阀体/Body	球墨铸铁/BSEN1563EN-GJS-450-10
2	闸板/Disc	球墨铸铁/BSEN1563EN-GJS-450-10/EPDM
3	上密封盖/Upper Gland	球墨铸铁/BSEN1563EN-GJS-450-10
4	紧固件/Fasteners	碳钢镀达克罗/Carbon Steel with Dacromet Coating

规格DIMENSIONS(PN10)

DN	长度/LENGTH	Ø D	PCD	H	B	N-Ø A	螺栓尺寸 SIZE OF BOLT	重量/WEIGHT (Kg)
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
50	203	165	125	85	19	4 - Ø 19	M16	19.8
65	216	185	145	88	19	4 - Ø 19	M16	21.3
80	241	200	160	102	19	8 - Ø 19	M16	22.4
100	292	220	180	118	19	8 - Ø 19	M16	23.3
150	356	285	240	151	19	8 - Ø 19	M20	25.8
200	495	340	295	182	20	8 - Ø 19	M20	27.2
250	622	395	350	248	22	12 - Ø 19	M20	29.3
300	698	445	400	289	24.5	12 - Ø 19	M20	31.5

规格DIMENSIONS(PN16)

DN	长度/LENGTH	Ø D	PCD	H	B	N-Ø A	螺栓尺寸 SIZE OF BOLT	重量/WEIGHT (Kg)
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
50	203	165	125	85	19	4 - Ø 19	M16	19.8
65	216	185	145	88	19	4 - Ø 19	M16	21.3
80	241	200	160	102	19	8 - Ø 19	M16	22.4
100	292	220	180	118	19	8 - Ø 19	M16	23.3
150	356	285	240	151	19	8 - Ø 23	M20	25.8
200	495	340	295	182	20	12 - Ø 23	M20	27.2
250	622	405	355	248	22	12 - Ø 28	M24	29.3
300	698	460	410	289	24.5	12 - Ø 28	M24	31.5






双偏心蝶阀

DOUBLE ECCENTRIC CENTER BUTTERFLY VALVE

技术参数 SPECIFICATION

- 1 规格/DN: DN300-DN2000
- 2 工作压力/PN: PN10/PN16
- 3 设计标准/Design standard: BS5155
- 4 结构长度/Face to face length: BS5155/BS EN558-1
- 5 法兰标准/End flang: BS4504/BS EN 1092-2/GB/T17241.6
- 6 测试标准/Test: BS EN1074-2 · GB/T13927
- 7 适用介质温度/Applicable Temps: ≤80℃

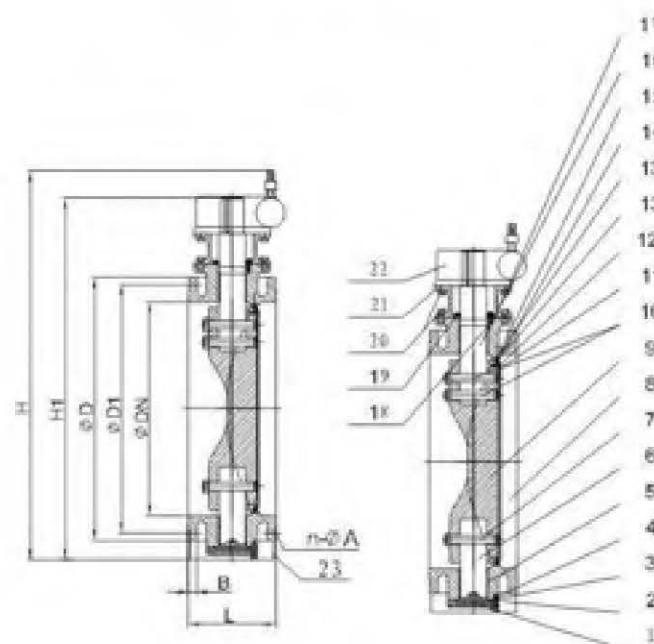

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	底座/Bottom cover	球墨铸铁/BS EN 1563 EN-GJS-450-10
2	调节板/Adjusting plate	SS304
3	O型圈/O-ring	EPDM
4	螺栓/Hexagon bolt	碳钢镀达克罗/Carbon Steel with Dacromet Coating
5	下轴套/Lower shaft sleeve	ZYHNMT
6	下轴/Lower shaft	SS304
7	轴销/Shaft pin	SS304
8	阀体/Valve body	球墨铸铁/BS EN 1563 EN-GJS-450-10
9	阀板/Disk	球墨铸铁/BS EN 1563 EN-GJS-450-10
10	轴销/Shaft pin	SS304
11	密封盖/Gland	SS304
12	螺栓/Inside hexagon bolt	SS304
13	橡胶圈/Rubber ring	EPDM
14	阀体密封圈/Body sealing ring	SS304
15	O型圈/O-ring	EPDM
16	上轴/Upper shaft	SS304
17	上轴套/Upper shaft sleeve	ZYHNMT
18	螺栓/Hexagon bolt	SS304
19	密封盖/Sealing gland	SS304
20	螺栓/Hexagon bolt	碳钢镀达克罗/Carbon Steel with Dacromet Coating
21	支撑盘/Support	球墨铸铁/BS EN 1563 EN-GJS-450-10
22	执行器/Actuator	根据客户要求/According to the customer request
23	支撑脚/Support foot	球墨铸铁/BS EN 1563 EN-GJS-450-10

功能和特点 FUNCTION & FEATURES

1. 小巧轻便, 安装简单。
2. 可立式或卧式安装, 安装方向无定型要求。
3. 该蝶阀具有较高抗腐蚀性。
4. 环氧树脂粉末涂层, 并通过WRAS认证。
5. 紧固件为304不锈钢和碳钢镀达克罗材质。
1. Compact and light-weight, easy installation.
2. Can be vertical or horizontal installation, the installation directions amorphous requirements.
3. The butterfly valve has the advantages of high corrosion resistance.
4. Epoxy resin powder coating, and through WRAS certification.
5. Fastening piece for 304 stainless steel and carbon steel plating Dacromet material.

规格DIMENSIONS(PN10)

DN	L	OD	OD1	H	H1	B	n-ØA	螺栓尺寸	SIZE OF BOLT
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
300	178	445	400	852	753	24.5	12-Ø23	M20	
400	216	565	515	955	855	24.5	16-Ø28	M24	
500	229	670	620	1100	1000	26.5	20-Ø28	M24	
600	267	780	725	1225	1125	30	20-Ø31	M27	
700	292	895	840	1335	1235	32.5	24-Ø31	M27	
800	318	1015	950	1445	1345	35	24-Ø34	M30	
900	330	1115	1050	1586	1486	37.5	28-Ø34	M30	
1000	410	1230	1160	1724	1624	40	28-Ø37	M33	
1200	470	1455	1380	1861	1741	45	32-Ø40	M36	
1400	530	1675	1590			46	36-Ø43	M39	
1600	600	1915	1820			49.5	40-Ø49	M45	
1800	670	2115	2020			52	44-Ø49	M45	
2000	760	2325	2230			55	48-Ø49	M45	

规格DIMENSIONS(PN16)

DN	L	OD	OD1	H	H1	B	n-ØA	螺栓尺寸	SIZE OF BOLT
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
460	410	852	753	24.5	12-Ø28	M24			
580	525	955	855	28	16-Ø31	M27			
715	650	1100	1000	31.5	20-Ø34	M30			
840	770	1235	1135	36	20-Ø37	M33			
910	840	1335	1235	39.5	24-Ø37	M33			
1025	950	1445	1345	43	24-Ø40	M36			
1125	1050	1586	1486	46.5	28-Ø40	M36			
1255	1170	1724	1624	50	28-Ø43	M39			
1485	1390	1861	1741	57	32-Ø49	M45			
1685	1590			60	36-Ø49	M45			
1930	1820			65	40-Ø56	M52			
2130	2020			70	44-Ø56	M52			
2345	2230			75	48-Ø62	M56			




DIN3352 F4/F5软密封闸阀

DIN3352 F4/F5 RESILIENT SEATED SLUICE/GATE VALVE

技术参数 SPECIFICATION

- 1 规格/DN: DN50-DN600
- 2 工作压力/PN: PN10/PN16
- 3 设计标准/Design standard: DIN3352
- 4 结构长度/Face to face length: DIN3352-F4/F5
- 5 法兰标准/End flang: BS4504/BSEN1092-2 - GB/17241.6 ISO7005.2
- 6 测试标准/Test: BSEN1074-1-2 - GB/T13927
- 7 适用介质温度/Applicable Temps: $\leq 80^{\circ}\text{C}$

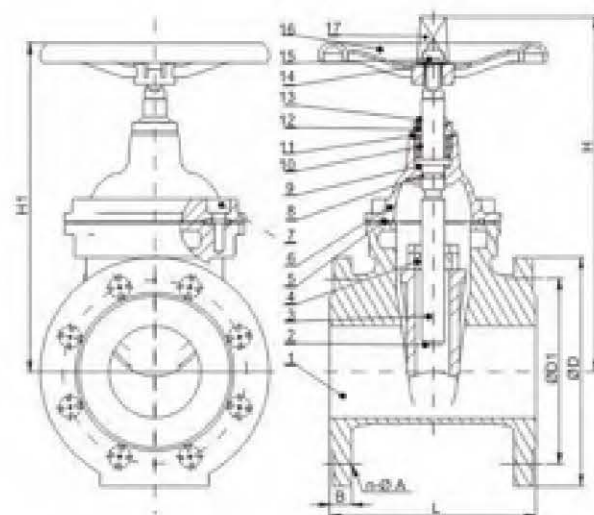

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	阀体/Body	球墨铸铁/BSEN1563 EN-GJS-450-10
2	闸板/Disc	球墨铸铁/BSEN1563 EN-GJS-450-10
3	阀杆/Stem	SS420
4	螺母/Disc Nut	黄铜/Brass
5	阀盖垫片/Bonnet Gasket	EPDM
6	阀盖/Bonnet	球墨铸铁/BSEN1563 EN-GJS-450-10
7	螺栓/Bolt	碳钢镀锌/Carbon Steel With Zinc Coating
8	O型圈/O-Ring	EPDM
9	止退环/Thrust Ring	黄铜/Brass
10	O型圈/O-Ring	EPDM
11	O型圈/O-Ring	EPDM
12	密封套/Bushing	黄铜/Brass
13	防尘圈/Bust Proof Ring	EPDM
14	垫圈/Washer	碳钢镀锌/Carbon Steel With Zinc Coating
15	螺栓/Bolt	碳钢镀锌/Carbon Steel With Zinc Coating
16	手轮/Hand Wheel	球墨铸铁/BSEN1563 EN-GJS-450-10
17	方帽/Stem Cap	球墨铸铁/BSEN1563 EN-GJS-450-10

规格DIMENSIONS(PN10)

DN	长度LENGTH (mm)		OD	OD1	H	H1	B	N-ØA	螺栓尺寸	重量WEIGHT
(mm)	F4	F5	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	SIZE OF BOLT	(KG)
50	150	250	165	125	277	227	19	4-Ø19	M16	9
80	180	280	200	160	326	276	19	8-Ø19	M16	14.2
100	190	300	220	180	364	314	19	8-Ø19	M16	18.6
150	210	350	285	240	452	402	19	8-Ø23	M20	36.2
200	230	400	340	295	538	487	20	8-Ø23	M20	58.4
250	250	450	395	350	805	755	22	12-Ø23	M20	85.4
300	270	500	445	400	818	768	24.5	12-Ø23	M20	132
400	310	600	565	515	1049	999	24.5	16-Ø28	M24	262.4
500	350	700	670	620	1257	1207	26.5	20-Ø28	M24	385
600	390	800	780	725	1405	1355	30	20-Ø31	M27	527

规格DIMENSIONS(PN16)

DN	长度LENGTH (mm)		OD	OD1	H	H1	B	N-ØA	螺栓尺寸	重量WEIGHT
(mm)	F4	F5	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	SIZE OF BOLT	(KG)
50	150	250	165	125	277	227	19	4-Ø19	M16	9
80	180	280	200	160	326	276	19	8-Ø19	M16	14.2
100	190	300	220	180	364	314	19	8-Ø19	M16	18.6
150	210	350	285	240	452	402	19	8-Ø23	M20	36.2
200	230	400	340	295	538	487	20	12-Ø23	M20	58.4
250	250	450	405	355	805	755	22	12-Ø28	M24	85.4
300	270	500	460	410	818	768	24.5	12-Ø28	M24	132
400	310	600	580	525	1049	999	28	16-Ø31	M27	262.4
500	350	700	715	650	1257	1207	31.5	20-Ø34	M30	385
600	390	800	840	770	1405	1355	36	20-Ø37	M33	527




DIN3352 Y型过滤器

DIN3352 Y STAINER

技术参数 SPECIFICATION

- 1 规格/DN: DN15-DN500
- 2 工作压力/PN: PN16
- 3 设计标准/Design standard: DIN3352
- 4 结构长度/Face to face length: DIN3202-F1
- 5 橡胶标准/Elastomer: EN681-2
- 6 球墨铸铁/Ductile Iron: BS EN1563 EN-GJS-450-10
- 7 涂层标准/Coating: WIS4-52-01
- 8 钻孔标准/Drilling Spec: EN1092-2

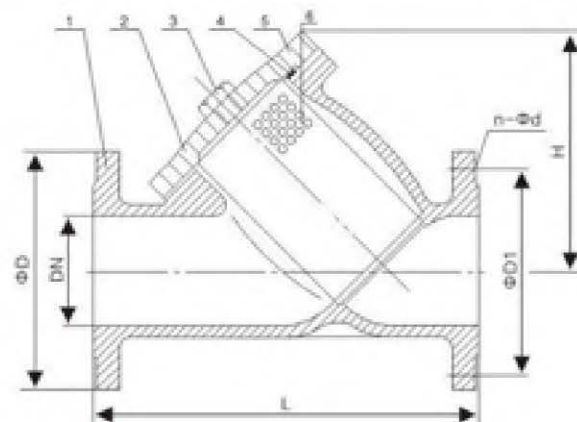

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	阀体/Body	球墨铸铁/BS EN 1563 EN-GJS-450-10
2	阀盖/Cover	球墨铸铁/BS EN 1563 EN-GJS-450-10
3	塞子/Plug	镀锌钢 带BSPT螺纹/Zinc Steel BSPT
4	密封垫/Gasket	EPDM/NBR
5	螺栓和螺母/Bolt&Nut	不锈钢/碳钢镀达克罗/碳钢镀锌 Stainless Steel/Carbon Steel With Dacromet Coating/ Carbon Steel With Zinc Coating
6	过滤网/Screen	不锈钢网筛/不锈钢冲孔网/SS Wire Screen/SS Perforated Mesh

规格DIMENSIONS(PN16)

Size	L	H	ØD	D1	N-Ød	Plug	W.T(kg)
DN15	130	65	95	65	4-Ø14	1/4"	2
DN20	150	70	105	75	4-Ø14	1/4"	2.3
DN25	160	80	115	85	4-Ø14	1/4"	3.2
DN32	180	90	140	100	4-Ø19	1/4"	5
DN40	200	135	150	110	4-Ø19	1/2"	6.5
DN50	230	150	165	125	4-Ø19	1/2"	8.7
DN65	290	160	185	145	4-Ø19	1/2"	12
DN80	310	200	200	160	8-Ø19	1/2"	19
DN100	350	240	220	180	8-Ø19	1/2"	27
DN125	400	290	250	210	8-Ø19	3/4"	40
DN150	480	330	285	240	8-Ø23	3/4"	58
DN200	600	380	340	295	12-Ø23	3/4"	86
DN250	730	480	405	355	12-Ø28	1"	127
DN300	850	550	460	410	12-Ø28	1"	200
DN350	980	661	520	470	16-Ø28	2"	320
DN400	1100	739	580	525	16-Ø31	2"	420
DN450	1200	830	640	585	20-Ø31	2"	620
DN500	1250	910	715	650	20-Ø34	2"	780







铸铁修补器

DUCTILE IRON REPAIR CLAMP

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01

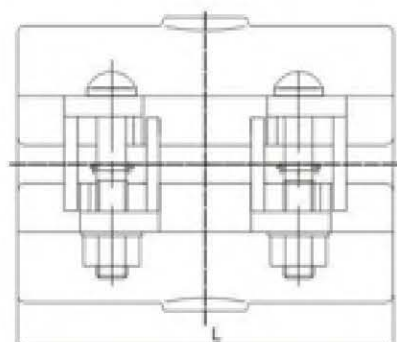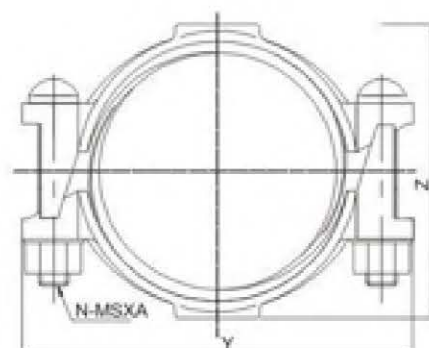

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR
3	紧固件/Fasteners	不锈钢/碳钢镀锌/碳钢镀锌/stainless Steel/Carbon Steel With Dacromet Coating/Carbon Steel With Zinc Coating
4	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

规格DIMENSIONS(PN10/PN16)

DN	管道外径范围/OD RANGE		L	BSP	N-MSXA	Y	Z	重量/WEIGHT
(mm)	最小MIN	最大MAX	(mm)	OUTLET	(mm)			(KG)
50/2"	66	75	200	3/4"	4 - M12 X 95	150	110	3.9
60/2.5"	75	84	200	3/4"	4 - M12 X 95	159	119	4.8
80/3"	92	103	200	3/4"	4 - M16 X 95	187	145	5.4
100/4"	110	129	200	1"	4 - M16 X 95	211	167	5.8
125/5"	141	152	200	1"	4 - M16 X 95	239	183	8.3
150/6"	165	185	200	1"	4 - M16 X 95	267	217	8.3
175/7"	200	210	200	1"	4 - M16 X 95	296	238	11.3
200/8"	216	226	200	1"	4 - M16 X 95	313	269	11.5
200/8"	230	243	200	1"	4 - M16 X 95	328	281	12.5
250/10"	269	293	368	1"	4 - M20 X 95	462	352	18.7
300/12"	322	339	439	1"	4 - M20 X 95	534	406	25.8






承口修补器

Q/QUICK-CXT ENCAPSULATION CLAMP

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01

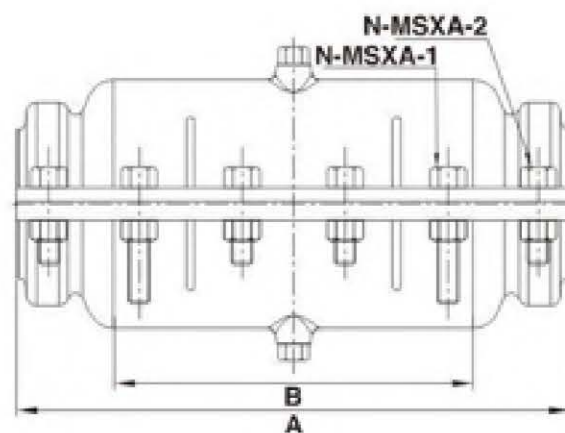

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR
3	紧固件/Fasteners	不锈钢/碳钢镀锌/碳钢镀锌/stainless Steel/Carbon Steel With Dacromet Coating/Carbon Steel With Zinc Coating
4	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

规格DIMENSIONS(PN10/PN16)

DN	管道外径范围/OD RANGE		A	B	N-MSXA-1	N-MSXA-2	重量/WEIGHT
(mm)	最小MIN	最大MAX	(mm)	(mm)	(mm)	(mm)	(kg)
80"	93	100	430	290	4 - M16 x 90	8 - M16 x 60	23
100"	120	128	430	290	4 - M16 x 90	8 - M16 x 60	29
125"	136	151	360	130	4 - M16 x 90	8 - M16 x 60	29
150"	175	183	430	290	4 - M16 x 90	8 - M16 x 60	33
200"	229	237	430	290	4 - M16 x 90	8 - M16 x 60	41







不锈钢单卡管道修补器

STAINLESS STEEL SINGLE BAND REPAIR CLAMP

技术参数 SPECIFICATION

1 测试标准/Type Test:
EN14525

2 橡胶标准/Elastomeric:
EN681-2
BS1449-304S15-2B
BS EN ISO 898-1
BS4190-4

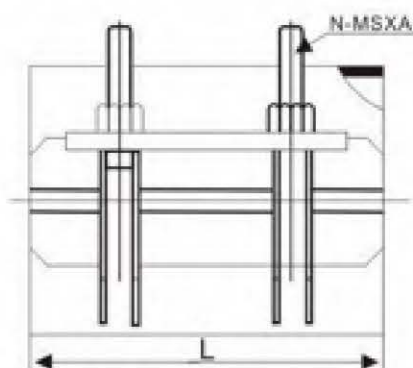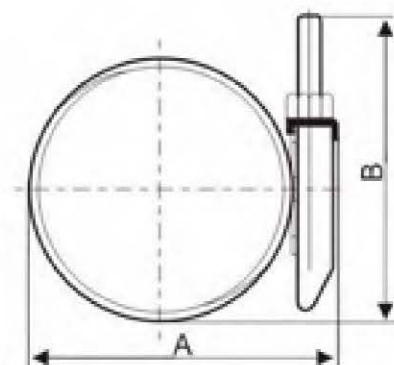

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	SS304
2	齿板/Jaws	SS304
3	密封垫板/Seals	EPDM/NBR
4	紧固件/Fasteners	不锈钢/STAINLESS STEEL

规格DIMENSIONS(PN10/PN16)

管道外径范围/CO RANGE		L		A		B		N-MSXA (mm)			重量
最小MIN	最大MAX	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	200	300	400	WEIGHT(Kg)
87	96	200	300	400	124	183		2 - M16 X 175	3 - M16 X 175	4 - M16 X 175	1.79
95	105	200	300	400	133	188		2 - M16 X 175	3 - M16 X 175	4 - M16 X 175	1.95
102	112	200	300	400	140	191		2 - M16 X 175	3 - M16 X 175	4 - M16 X 175	2.01
113	123	200	300	400	151	197		2 - M16 X 175	3 - M16 X 175	4 - M16 X 175	2.18
120	130	200	300	400	158	200		2 - M16 X 175	3 - M16 X 175	4 - M16 X 175	2.30
132	142	200	300	400	170	206		2 - M16 X 175	3 - M16 X 175	4 - M16 X 175	2.39
135	145	200	300	400	173	208		2 - M16 X 175	3 - M16 X 175	4 - M16 X 175	2.41
147	157	200	300	400	185	214		2 - M16 X 175	3 - M16 X 175	4 - M16 X 175	2.51
151	161	200	300	400	189	216		2 - M16 X 175	3 - M16 X 175	4 - M16 X 175	2.51
160	170	200	300	400	198	220		2 - M16 X 175	3 - M16 X 175	4 - M16 X 175	2.63
167	178	200	300	400	206	224		2 - M16 X 175	3 - M16 X 175	4 - M16 X 175	2.68
176	187	200	300	400	215	229		3 - M16 X 175	4 - M16 X 175	6 - M16 X 175	2.75
186	196	200	300	400	224	233		3 - M16 X 175	4 - M16 X 175	6 - M16 X 175	2.94
193	203	200	300	400	231	237		3 - M16 X 175	4 - M16 X 175	6 - M16 X 175	2.89
200	210	200	300	400	238	240		3 - M16 X 175	4 - M16 X 175	6 - M16 X 175	3.17
215	225	200	300	400	252	248		3 - M16 X 175	4 - M16 X 175	6 - M16 X 175	3.30
219	229	200	300	400	257	250		3 - M16 X 175	4 - M16 X 175	6 - M16 X 175	3.33
230	240		300	400	268	255			4 - M16 X 175	6 - M16 X 175	5.10
237	247		300	400	275	259			4 - M16 X 175	6 - M16 X 175	5.35
240	250		300	400	278	260			4 - M16 X 175	6 - M16 X 175	5.38
250	260		300	400	288	265			4 - M16 X 175	6 - M16 X 175	5.51
257	267		300	400	295	269			4 - M16 X 175	6 - M16 X 175	5.61
261	271		300	400	299	271			4 - M16 X 175	6 - M16 X 175	5.67
270	280		300	400	308	280			4 - M16 X 175	6 - M16 X 175	5.79
280	291		300	400	319	291			4 - M16 X 175	6 - M16 X 175	5.92
290	300		300	400	328	300			4 - M16 X 175	6 - M16 X 175	6.05
300	310		300	400	338	310			4 - M16 X 175	6 - M16 X 175	6.18
310	320		300	400	348	320			4 - M16 X 175	6 - M16 X 175	6.31
315	325		300	400	353	325			4 - M16 X 175	6 - M16 X 175	6.39
320	330		300	400	358	330			4 - M16 X 175	6 - M16 X 175	6.45
330	340		300	400	368	340			4 - M16 X 175	6 - M16 X 175	6.59
340	350		300	400	378	350			4 - M16 X 175	6 - M16 X 175	6.72
350	360		300	400	388	360			4 - M16 X 175	6 - M16 X 175	6.85





不锈钢双卡管道修补器

STAINLESS STEEL DOUBLE BAND REPAIR CLAMP

技术参数 SPECIFICATION

1 测试标准/Type Test:
EN14525

2 橡胶标准/Elastomeric:
EN681-2
BS1449-304S15-2B
BS EN ISO 898-1
BS4190-4

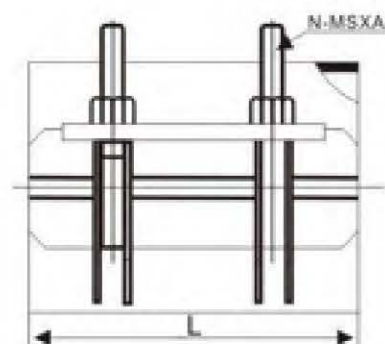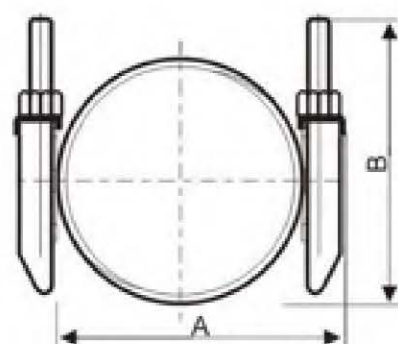

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR
3	紧固件/Fasteners	不锈钢/碳钢镀锌/Carbon Steel With Dacromet Coating/Carbon Steel With Zinc Coating
4	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

规格DIMENSIONS(PN10/PN16)

管道口径范围/CO RANGE		L		A		B		N-MSXA (mm)			重量
最小MIN	最大MAX	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	200	300	400	WEIGHT(Kg)
88	110	200	300	400	183	168	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		2.63
108	128	200	300	400	201	177	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		2.84
113	133	200	300	400	206	179	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		2.94
120	140	200	300	400	213	183	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		3.09
130	150	200	300	400	223	188	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		3.05
140	160	200	300	400	233	193	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		3.15
150	170	200	300	400	243	198	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		3.26
159	180	200	300	400	253	203	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		3.31
168	189	200	300	400	262	207	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		3.36
170	190	200	300	400	263	208	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		3.41
175	195	200	300	400	268	210	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		3.44
190	210	200	300	400	283	225	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		3.57
205	225	200	300	400	298	240	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		3.85
210	230	200	300	400	303	245	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		3.90
216	238	200	300	400	311	253	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		3.95
220	242	200	300	400	315	257	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		3.97
240	260	200	300	400	333	275	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		4.15
243	263	200	300	400	336	278	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		4.20
255	275	200	300	400	348	290	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		4.31
272	292	200	300	400	365	307	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		4.42
282	302	200	300	400	375	317	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		4.52
295	315	200	300	400	388	330	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		4.62
307	327	200	300	400	400	342	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		4.73
315	335	200	300	400	408	350	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		4.83
319	339	200	300	400	412	354	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		4.88
322	344	200	300	400	417	359	4 - M16 X 175	6 - M16 X 175	8 - M16 X 175		4.94
333	353		300	400	426	368		6 - M16 X 175	8 - M16 X 175		8.27
341	361		300	400	434	376		6 - M16 X 175	8 - M16 X 175		8.38
365	385		300	400	458	400		6 - M16 X 175	8 - M16 X 175		8.58
396	416		300	400	489	431		6 - M16 X 175	8 - M16 X 175		8.73
410	430		300	400	503	445		6 - M16 X 175	8 - M16 X 175		8.89





不锈钢/球墨铸铁单卡管道修补器

STAINLESS STEEL/DUCTILE IRON SINGLE BAND REPAIR CLAMP

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525
- 2 橡胶标准/Elastomeric:
EN681-2
BS1449-304S15-2B
BSEN ISO898-1
BS4190-4
- 3 涂层标准/Coating:
WIS4-52-01

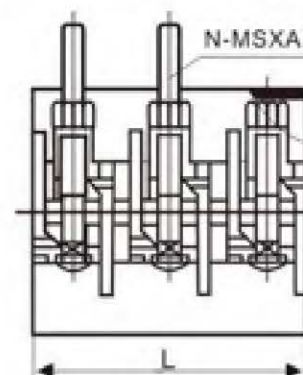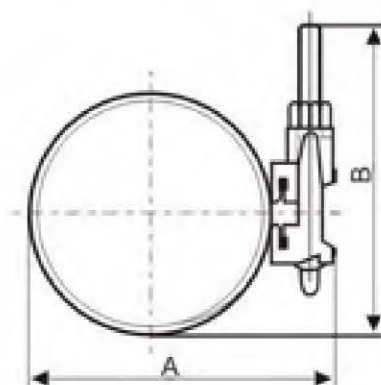

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	Ss304
2	齿板/Jaws	球墨铸铁/Ductile Iron
3	密封垫板/Seals	EPDM/NBR
4	紧固件/Fasteners	不锈钢/碳钢镀锌/碳钢镀锌/stainless Steel/Carbon Steel With Dacromet Coating/Carbon Steel With Zinc Coating
5	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

规格DIMENSIONS(PN10/PN16)

管道外径范围/OD RANGE		L		A		B		N-MSXA (mm)			重量
最小MIN	最大MAX	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	200	300	400	WEIGHT(Kg)
87	96	200	300	400	124	141	3 - M16 X 175	4 - M16 X 175	6 - M16 X 175		4.29
95	105	200	300	400	133	150	3 - M16 X 175	4 - M16 X 175	6 - M16 X 175		4.45
102	112	200	300	400	140	157	3 - M16 X 175	4 - M16 X 175	6 - M16 X 175		4.51
113	123	200	300	400	151	168	3 - M16 X 175	4 - M16 X 175	6 - M16 X 175		4.68
120	130	200	300	400	158	175	3 - M16 X 175	4 - M16 X 175	6 - M16 X 175		4.80
132	142	200	300	400	170	187	3 - M16 X 175	4 - M16 X 175	6 - M16 X 175		4.89
135	145	200	300	400	173	190	3 - M16 X 175	4 - M16 X 175	6 - M16 X 175		4.91
147	157	200	300	400	185	202	3 - M16 X 175	4 - M16 X 175	6 - M16 X 175		5.01
151	161	200	300	400	189	206	3 - M16 X 175	4 - M16 X 175	6 - M16 X 175		5.04
160	170	200	300	400	198	215	3 - M16 X 175	4 - M16 X 175	6 - M16 X 175		5.13
167	178	200	300	400	206	223	3 - M16 X 175	4 - M16 X 175	6 - M16 X 175		5.18
176	187	200	300	400	215	233	3 - M16 X 175	4 - M16 X 175	6 - M16 X 175		5.25
186	196	200	300	400	224	241	3 - M16 X 175	4 - M16 X 175	6 - M16 X 175		5.30
193	203	200	300	400	231	248	3 - M16 X 175	4 - M16 X 175	6 - M16 X 175		5.44
200	210	200	300	400	238	250	3 - M16 X 175	4 - M16 X 175	6 - M16 X 175		5.67
215	225	200	300	400	252	270	3 - M16 X 175	4 - M16 X 175	6 - M16 X 175		5.80
219	229	200	300	400	257	274	3 - M16 X 175	4 - M16 X 175	6 - M16 X 175		5.83
230	240		300	400	268	285		4 - M16 X 175	6 - M16 X 175		8.65
237	247		300	400	275	292		4 - M16 X 175	6 - M16 X 175		8.75
240	250		300	400	278	295		4 - M16 X 175	6 - M16 X 175		8.78
250	260		300	400	288	305		4 - M16 X 175	6 - M16 X 175		8.91
257	267		300	400	295	312		4 - M16 X 175	6 - M16 X 175		9.01
261	271		300	400	299	316		4 - M16 X 175	6 - M16 X 175		9.07
270	280		300	400	308	325		4 - M16 X 175	6 - M16 X 175		9.19
280	291		300	400	319	336		4 - M16 X 175	6 - M16 X 175		9.32
290	300		300	400	328	345		4 - M16 X 175	6 - M16 X 175		9.45
300	310		300	400	338	355		4 - M16 X 175	6 - M16 X 175		9.58
310	320		300	400	348	365		4 - M16 X 175	6 - M16 X 175		9.71
315	325		300	400	353	370		4 - M16 X 175	6 - M16 X 175		9.79
320	330		300	400	358	375		4 - M16 X 175	6 - M16 X 175		9.89
330	340		300	400	368	385		4 - M16 X 175	6 - M16 X 175		9.99
340	350		300	400	378	395		4 - M16 X 175	6 - M16 X 175		10.12
350	360		300	400	388	405		4 - M16 X 175	6 - M16 X 175		10.25





不锈钢/球墨铸铁双卡管道修补器

STAINLESS STEEL/DUCTILE IRON DOUBLE BAND REPAIR CLAMP

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525
- 2 橡胶标准/Elastomeric:
EN681-2
BS1449-304S15-2B
BS EN ISO 898-1
BS4190-4
- 3 涂层标准/Coating:
WIS4-52-01

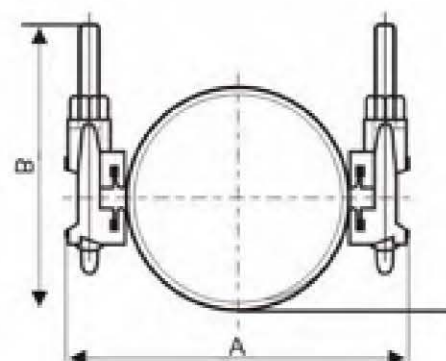

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	SS304
2	齿板/Jaws	球墨铸铁/Ductile Iron
3	密封垫板/Seals	EPDM/NBR
4	紧固件/Fasteners	不锈钢/碳钢镀锌/碳钢镀锌/stainless Steel/Carbon Steel With Dacromet Coating/Carbon Steel With Zinc Coating
5	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

规格DIMENSIONS(PN10/PN16)

管道外径范围/OD RANGE		L			A		B		N-MSXA (mm)			重量
最小MIN	最大MAX	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	200	300	400	WEIGHT(Kg)
88	110	200	300	400	181	155	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			7.13
108	128	200	300	400	199	173	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			7.34
113	133	200	300	400	204	178	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			7.44
120	140	200	300	400	211	185	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			7.55
130	150	200	300	400	221	195	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			7.59
140	160	200	300	400	231	205	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			7.65
150	170	200	300	400	241	215	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			7.76
159	180	200	300	400	251	225	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			7.81
168	189	200	300	400	260	234	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			7.86
170	190	200	300	400	261	235	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			7.91
175	195	200	300	400	266	240	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			7.94
190	210	200	300	400	281	255	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			8.07
205	225	200	300	400	296	270	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			8.35
210	230	200	300	400	301	275	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			8.40
216	238	200	300	400	309	283	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			8.45
220	242	200	300	400	313	287	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			8.47
240	260	200	300	400	331	305	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			8.65
243	263	200	300	400	334	308	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			8.70
255	275	200	300	400	346	320	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			8.81
272	292	200	300	400	363	337	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			8.92
282	302	200	300	400	373	347	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			9.02
295	315	200	300	400	386	360	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			9.12
307	327	200	300	400	398	372	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			9.23
315	335	200	300	400	406	380	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			9.33
319	339	200	300	400	410	384	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			9.38
322	344	200	300	400	415	389	6 - M16 X 175	8 - M16 X 175	12 - M16 X 175			9.44
333	353	300	400	424	398			8 - M16 X 175		12 - M16 X 175		14.97
341	361	300	400	432	406			8 - M16 X 175		12 - M16 X 175		15.08
365	385	300	400	456	430			8 - M16 X 175		12 - M16 X 175		15.28
396	416	300	400	487	461			8 - M16 X 175		12 - M16 X 175		15.43
410	430	300	400	501	475			8 - M16 X 175		12 - M16 X 175		15.59




双法兰可拆卸接头

DOUBLE FLANGE DISMANTLING JOINT

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 钻孔标准/Drilling Spec:
EN1092-2

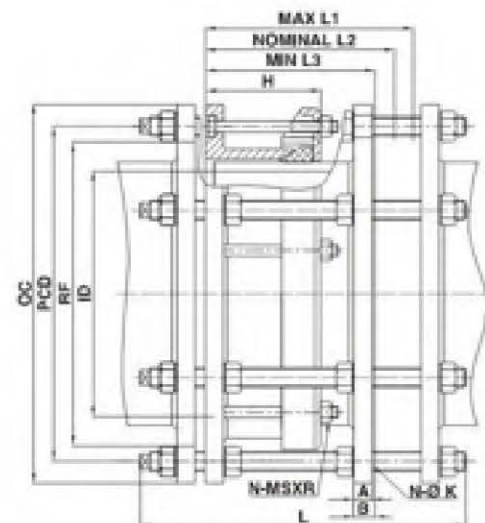

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	压盖/Gland	球墨铸铁/Ductile Iron
3	密封圈/Seals	EPDM/NBR
4	紧固件/Fasteners	不锈钢/碳钢镀锌/碳钢镀锌/stainless Steel/Carbon Steel With Dacromet Coating/Carbon Steel With Zinc Coating
5	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

规格DIMENSIONS(PN10/PN16)

DN (mm)	最大 MAX L1	最小 MIN L3	标准 NOMINAL L2	A (mm)	B (mm)	L (mm)	H (mm)	ID (mm)	RF (mm)	PCD (mm)	OD (mm)	N - Ø K	N - MSXR (mm)	螺栓扭矩 BOLT TORQUE(Nm)	重量 WEIGHT(kg)
80	220	180	200	16	19	330	112	80	132	160	200	8-Ø19	4-M12x120	55-65	13
100	220	180	200	16	19	330	112	100	156	102	220	8-Ø19	4-M12x120	55-65	16
125	220	180	200	16	19	330	112	125	184	210	250	8-Ø19	4-M12x120	55-65	16
150	220	180	200	16	19	330	112	150	211	240	285	8-Ø23	4-M12x130	55-65	25
200	220	180	200	17	20	340	123	200	266	295	340	8-Ø23 12-Ø23	4-M12x130	55-65	34
250	220	180	200	19 21.5	22 24.5	340	123	250	319	350 355	395 405	12-Ø23 12-Ø28	6-M12x130	55-65	42
300	245	195	220	21.5	24.5	370	123	300	370	400 410	445 460	12-Ø23 12-Ø28	8-M12x155	55-65	52
350	245	195	220	21.5 22.5	24.5 26.5	370	123	350	429	460 470	505 520	16-Ø23 16-Ø28	8-M12x155	55-65	145
400	245	195	220	21.5 24.5	24.5 28.5	380	135	400	480	515 525	565 580	16-Ø23 16-Ø31	10-M12x155	55-65	145
450	254	195	220	21.5 26	24.5 29	380	135	450	530	565 548	615 640	20-Ø28 20-Ø31	10-M12x155	55-65	145
500	245	195	220	22.5 27.5	26.5 31.5	380	135	500	582	620 609	670 715	20-Ø28 20-Ø37	10-M12x155	55-65	155
600	265	215	240	25 31	30 36	420	135	600	682	725 720	780 840	20-Ø31 20-Ø37	10-M12x155	55-65	197
700	265	215	240	27 34.5	32.5 39.5	420	135	700	794	840 895	895 910	24-Ø31 24-Ø37	12-M12x155	55-65	221
800	380	320	350	30 38	35 43	560	165	800	901	950 1015	1015 1025	24-Ø34 24-Ø40	12-M12x175	55-65	254
900	380	320	350	32.5 41.5	37.5 46.5	560	165	900	1001	1050 1115	1115 1125	28-Ø34 28-Ø40	14-M12x175	55-65	321
1000	380	320	350	35 45	40 50	560	165	1000	1112	1160 1170	1230 1255	32-Ø40 28-Ø43	14-M12x175	55-65	382
1200	400	340	370	40 52	45 57	600	165	1200	1328	1380 1390	1455 1485	32-Ø40 32-Ø49	16-M12x200	55-65	646






广范围柔性接头

UNIVERSAL STRAIGHT COUPLING

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 钻孔标准/Drilling Spec:
EN1092-1

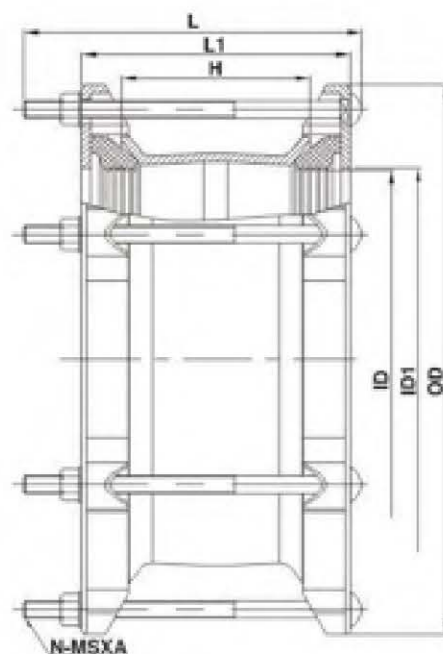

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	压盖/Glands	球墨铸铁/Ductile Iron
3	密封圈/Seals	EPDM/NBR
4	紧固件/Fasteners	不锈钢/碳钢镀锌/碳钢镀锌/stainless Steel/Carbon Steel With Dacromet Coating/Carbon Steel With Zinc Coating
5	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

规格DIMENSIONS(PN10/PN16)

DN	范围	L	L1	H	ID	ID1	OD	N-MSXA	螺栓扭矩	重量
(mm)	RANGE	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	BOLT TORQUE(Nm)	WEIGHT(Kg)
50	59-72	188	148	95	72	76	153	4 - M12 x 180	55 - 65	4.1
65	72-85	188	148	95	85	89	173	4 - M12 x 180	55 - 65	4.1
80	88-103	188	146	95	103	107	185	4 - M12 x 180	55 - 65	4.1
100	109-128	188	146	95	127	132	208	4 - M12 x 180	55 - 65	4.6
125	138-153	198	153	95	158	162	256	4 - M12 x 190	55 - 65	8.3
150	159-182	198	153	95	182	186	280	4 - M12 x 190	55 - 65	8.5
175	189-212	233	187	130	211	216	329	4 - M12 x 225	55 - 65	9.0
200	218-235	233	187	130	234	239	333	4 - M12 x 225	55 - 65	10.6
225	242-262	233	185	130	261	265	379	6 - M12 x 225	55 - 65	14.5
250	272-289	233	186	130	288	295	391	6 - M12 x 225	55 - 65	15.4
	315-349	233	187	130	349	352	464	6 - M12 x 225	55 - 65	20.0
300	322-339	233	187	130	338	345	444	6 - M12 x 225	55 - 65	23.1
	338-360	233	187	130	359	366	460	6 - M12 x 225	55 - 65	23.1
350	351-391	250	187	130	390	395	502	10 - M12 x 225	55 - 65	26.8
400	400-442	250	187	130	441	446	558	10 - M12 x 225	55 - 65	31.9
450	455-493	250	187	130	492	497	608	10 - M12 x 225	55 - 65	36.6
500	500-599	250	187	130	598	594	662	10 - M12 x 225	55 - 65	40.0
600	600-692	250	187	130	691	697	768	10 - M12 x 225	55 - 65	42.0
700	708-780	250	187	130	779	785	910	10 - M12 x 225	55 - 65	45.0






广范围单法兰接头

UNIVERSAL FLANGE ADAPTOR

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 钻孔标准/Drilling Spec:
EN1092-2

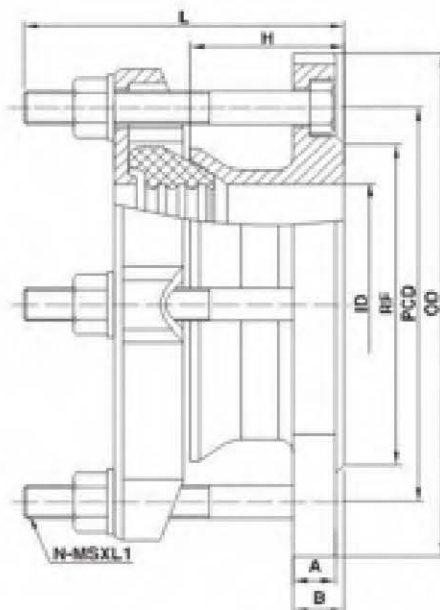

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	压盖/Gland	球墨铸铁/Ductile Iron
3	密封圈/Seals	EPDM/NBR
4	紧固件/Fasteners	不锈钢/碳钢镀锌/碳钢镀锌/stainless Steel/Carbon Steel With Dacromet Coating/Carbon Steel With Zinc Coating
5	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

规格DIMENSIONS(PN10/PN16)

DN (mm)	范围 RANGE	L (mm)	H (mm)	ID (mm)	RF (mm)	PCO (mm)	OD (mm)	N-Ø (mm)	BOLT SIZE	A (mm)	B (mm)	N-MSXL1 (mm)	螺栓扭矩/BOLT TORQUE (Nm)	EN10 91962	ASA	重量/WEIGHT (KG)
50	59-72	112	54	59	98	125	165	4-Ø19	M16	15	18	4-M12x100	55-65	A D E	125	4.9
65	72-85	112	54	72	118	145	185	4-Ø19	M16	15	18	4-M12x100	55-65	A D E	125	4.9
80	88-101	128	68	90	128	160	200	8-Ø19	M16	16	19	4-M12x115	55-65	A D E	125	4.9
100	109-128	138	73	116	153	180	220	8-Ø19	M16	16	19	4-M12x125	55-65	A D E	125	5.8
150-125	132-158	135	75	150	187	240	285	8-Ø19	M20	16	19	4-M12x125	55-65	A D E	125	7.8
150	158-182	135	75	164	204	240	285	8-Ø23	M20	16	19	4-M12x125	55-65	A D E	125	7.8
200	189-212	138	75	202	266	295	340	8-Ø23	M20	17	20	4-M12x125	55-65	A D E	125	11
250	218-235	138	75	218	266	295	340	12-Ø23	M20	17	20	4-M12x125	55-65	E	125	11
300	242-262	148	85	256	318	355	405	12-Ø23	M24	19	22	6-M12x135	55-65	DIMENSIONS, WEIGHTS & TECHNICAL DATA FOR ALTERNATIVE FLANGE DRILLINGS IS AVAILABLE ON REQUEST.		
350	272-289	148	85	272	318	355	405	12-Ø28	M24	19	22	6-M12x135	55-65			
400	315-349	168	100	333	370	410	460	12-Ø28	M24	20	23	6-M12x160	55-65			
450	322-339	168	100	322	367	410	460	12-Ø28	M24	20	23	6-M12x150	55-65			
500	338-360	226	158	322	367	410	460	12-Ø28	M24	20	23	6-M12x210	55-65	16.3		
550	351-391	196	128	355	430	460	520	16-Ø28	M24	26	32	8-M12x210	55-65			
600	400-442	198	130	404	480	525	580	16-Ø31	M27	27	32	8-M12x210	55-65			
650	455-491	200	130	454	532	576	640	20-Ø31	M27	29	34	10-M12x210	55-65			
700	500-599	200	130	504	583	620	715	20-Ø34	M30	30.5	35	10-M12x210	55-65	24.5		
750	600-692	206	135	604	686	770	840	20-Ø37	M33	34	39	10-M12x210	55-65			
800	708-780	206	135	705	794	840	910	24-Ø37	M33	39.5	45	10-M12x210	55-65			
850						840								29		
900																
950																
1000																






广范围变径柔性接头

UNIVERSAL STEPPED COUPLING

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 钻孔标准/Drilling Spec:
EN1092-1

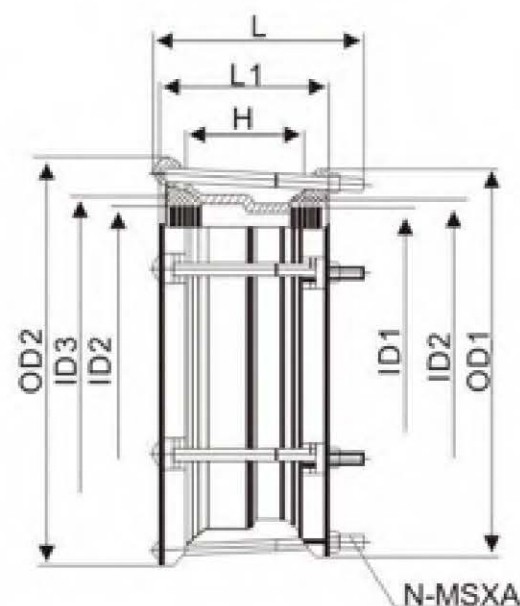

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	压盖/Glands	球墨铸铁/Ductile Iron
3	密封圈/Seals	EPDM/NBR
4	紧固件/Fasteners	不锈钢/碳钢镀锌/碳钢镀锌/stainless Steel/Carbon Steel With Dacromet Coating/Carbon Steel With Zinc Coating
5	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

规格DIMENSIONS(PN10/PN16)

DN	范围	L	L1	H	ID 1	ID 2	OD 1	ID 2	ID 3	OD 2	N-MSXA	螺栓扭矩 BOLT TORQUE(Nm)	DN
(mm)	RANGE	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)
50-80	(59 - 72) (88 - 103)	210	170	115	72	74	155	102	107	189	4-M12 x 200	55 - 65	4.8
65-80	(72 - 85) (88 - 103)	210	170	115	84	88	173	102	107	189	4-M12 x 200	55 - 65	5.3
80-100	(88 - 103) (108 - 128)	210	170	115	102	107	189	126	132	215	4-M12 x 200	55 - 65	5.7
100-125	(108 - 128) (132 - 158)	218	178	124	126	132	215	157	162	243	4-M12 x 210	55 - 65	6.0
125-150	(132 - 158) (158 - 182)	230	190	124	157	162	243	180	186	277	4-M12 x 220	55 - 65	6.5
175-200	(189 - 212) (218 - 235)	230	190	124	210	204	305	234	240	332	4-M12 x 220	55 - 65	7.2
225-250	(242 - 262) (272 - 289)	242	200	135	261	267	359	288	293	385	6-M12 x 235	55 - 65	7.8
250-300	(272 - 289) (322 - 339)	242	200	135	288	293	285	336	344	444	6-M12 x 235	55 - 65	8.1






PE管道用单法兰接头&柔性接头

PE FLANGE ADAPTOR & RESTRAINT COUPLING

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 钻孔标准/Drilling Spec:
EN1092-1

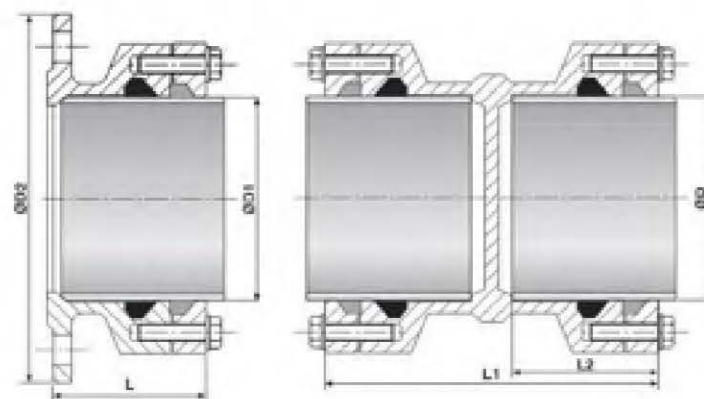

单法兰接头
Flange Adaptor

柔性接头
Coupling

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	压盖/Gland	球墨铸铁/Ductile Iron
3	止退环/Rings	黄铜/Brass
4	密封圈/Seals	EPDM/NBR
5	紧固件/Fasteners	不锈钢/碳钢镀锌/碳钢镀锌/Stainless Steel/Carbon Steel With Dacromet Coating/Carbon Steel With Zinc Coating
6	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

用途 APPLICATION

- 1.本接头用于管道之间的连接，通过作用于密封圈即可使管道处于密封状态。
 - 2.小巧轻便，便于安装。
 - 3.壁厚薄的PE管（3mm壁厚）和低压管道，同样适用。
- 1.The restraint system is effective independent of the pipe sealing and is achieved by tightening the lock ring.
2.The pipe end can be pushed into the sealing chamber without major effort. The flat gasket is already mounted on the flange.
3.For thin walled PE pipes (up to 3mm wall thickness) and low internal pressure as well the use of support liners is required.

规格DIMENSIONS(PN16)

法兰规格 FLANGEDN(mm)	法兰压力 FLANGE PN	D1 (mm)	L (mm)	D2 (mm)	重量 WEIGHT(Kg)
50	10/16	63	90	165	3.4
60	10/16	63	90	175	3.6
60	10/16	75	90	175	3.8
65	10/16	63	90	185	4.1
65	10/16	75	90	185	4.1
80	10/16	75	90	200	4.8
80	10/16	90	95	200	5.3
100	10/16	90	95	220	6.6
100	10/16	110	95	220	6.0
100	10/16	125	95	220	6.8
125	10/16	110	95	250	7.6
125	10/16	125	95	250	8.0
125	10/16	140	105	250	8.3
150	10/16	140	105	285	11.1
150	10/16	160	115	285	10.3
150	10/16	180	125	285	11.4
200	16	200	135	340	17.8
200	16	225	140	340	16.8
250	16	250	155	400	21.8
250	16	280	160	400	28.8
300	16	315	185	455	43.8
300	16	355	275	455	60.8

规格DIMENSIONS(PN16)

管道外径 PIPE Ø D(mm)	L1 (mm)	L2 (mm)	重量 WEIGHT(Kg)
63	170	80	3.0
75	175	80	3.8
90	180	85	5.2
110	180	85	6.2
125	185	85	7.6
140	195	95	8.8
160	220	105	11.8
180	240	115	14.3
200	260	125	21.3
225	265	130	25.8
250	300	145	32.0
280	305	150	38.3
315	360	175	58.3





MOPVC盘承管/盘插管

MOPVC FLANGED SOCKET / SPIGOT

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 钻孔标准/Drilling Spec:
EN1092-2
- 6 PVC管用管件标准/Standard:
EN12842

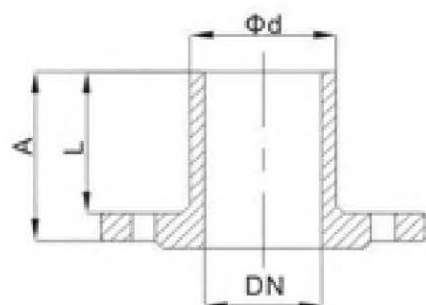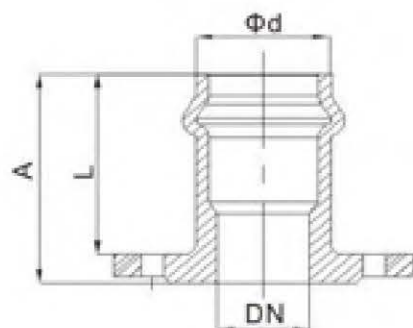

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR
3	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

盘承管FLANGED SOCKET PN16					盘插管FLANGED SPIGOT PN16				
DN	Ød	A	L	P/kg	DN	Ød	A	L	P/kg
40	150	100	90	2.8	40	50	120	90	2.8
50	50	100	90	3.3	50	63	125	95	3.9
50	63	100	95	3.6	60	75	130	95	4.5
60	63	110	95	4.7	80	90	130	95	5.7
60	75	100	100	4.4	100	90	130	95	5.4
65	75	100	100	5.3	100	110	130	95	7.0
80	75	100	100	5.0	125	125	170	135	8.5
80	90	120	105	5.5	125	140	170	135	8.9
100	110	130	115	6.2	150	160	170	120	11.5
125	125	140	125	8.5	200	180	170	130	14.9
125	140	140	130	9.0	200	200	170	130	16.7
150	160	160	145	11.6	200	225	205	170	17.8
200	200	180	155	16.5	250	250	200	150	28.0
200	225	180	155	20.5	250	280	245	200	25.0
250	250	190	175	24.1	300	315	200	155	34.5
250	280	190	185	27.0	350	355	250	190	44.0
300	315	220	190	30.5	400	400	250	190	57.5
400	400	290	230	63.0	400	450	270	225	56.8






MOPVC双承口弯管

MOPVC DOUBLE SOCKET BEND

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 PVC管用管件标准/Standard:
EN12842

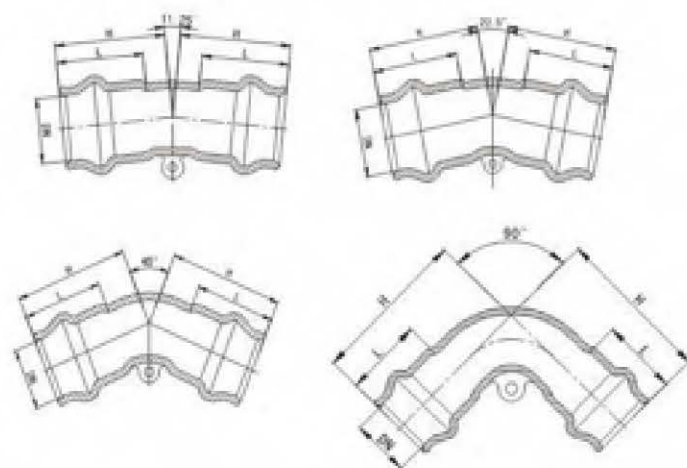

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR
3	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

11.25°				11.25°				11.25°				11.25°			
Ød	L	H	P/kg	L	H	P/kg	L	H	P/kg	L	H	P/kg	L	H	P/kg
50	80	100	1.3	80	100	1.4	80	120	1.7	80	140	1.8			
63	90	110	2.2	90	110	2.6	90	130	2.6	90	155	3.3			
75	90	115	3.0	90	115	3.7	90	130	3.8	90	160	3.8			
90	100	125	4.2	100	125	4.25	100	150	5.8	100	175	5.3			
110	110	140	5.8	110	140	6.3	110	170	7.9	110	195	8.0			
125	115	145	5.9	115	145	6.5	115	180	8.9	115	225	10.0			
140	120	150	7.4	120	150	7.4	120	185	10.0	120	230	12.0			
160	130	160	12.5	130	165	12.5	130	200	15.5	130	260	17.5			
200	140	170	16.5	140	180	18.5	140	210	23.0	140	300	29.0			
225	150	190	16.0	150	195	16.7	150	230	30.0	150	310	34.0			
250	160	200	31.0	160	210	24.0	160	270	35.0	160	345	40.0			
280	170	220	29.0	170	245	36.0	170	300	44.0	170	375	48.0			
315	185	240	44.4	185	270	43.0	185	320	48.0	185	400	55.0			
355	205	259	47.5	205	319	48.5	205	376	46.5	205					






MOPVC全承口三通

MOPVC ALL SOCKET TEE

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 PVC管用管件标准/Standard:
EN12842

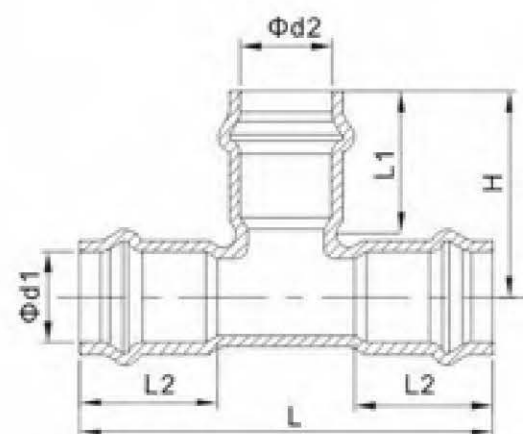

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR
3	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

规格/DIMENSIONS (PN16)								规格/DIMENSIONS (PN16)							
尺寸/SIZE	Φd1	Φd2	A	H	L1	L2	P/kg	尺寸/SIZE	Φd1	Φd2	A	H	L1	L2	P/kg
50/50	50	50	220	110	95	95	2.2	200/200	200	200	520	245	155	155	33.0
63/50	63	50	245	125	95	90	3.8	225/75	225	75	400	205	155	100	27.5
63/63	63	63	250	120	95	95	3.8	225/90	225	90	440	220	155	105	28.0
75/50	75	50	250	130	95	95	4.2	225/110	225	110	460	230	155	115	29.0
75/63	75	63	250	135	95	95	4.5	225/140	255	140	455	240	155	130	30.0
75/75	75	75	265	135	95	95	5.2	225/160	255	160	510	250	155	145	32.0
90/63	90	63	275	140	105	95	5.9	225/180	255	180	490	275	155	155	34.0
90/75	90	75	290	140	105	100	6.5	225/200	225	200	520	270	175	155	35.0
90/90	90	90	305	150	105	105	7.7	225/225	225	225	560	270	175	155	37.5
110/63	110	63	295	150	115	95	7.6	250/90	250	90	475	230	175	105	28.6
110/75	110	75	310	150	115	100	8.3	250/110	250	110	495	240	175	115	26.5
110/90	110	90	325	160	115	105	8.8	250/140	250	140	510	260	175	130	36.2
110/110	110	110	345	170	115	115	10.0	250/160	250	160	545	260	175	145	36.5
125/63	125	63	305	160	125	95	7.7	250/200	250	200	570	270	175	155	38.5
125/75	125	75	320	160	125	100	10.1	250/250	250	250	620	290	175	175	43.0
125/90	125	90	335	170	125	105	8.8	280/90	280	90	495	245	185	105	36.0
125/110	125	110	355	180	125	115	9.1	280/110	280	110	515	255	185	115	38.0
125/125	125	125	380	185	125	125	12.1	280/160	280	160	565	275	185	145	44.0
140/63	140	63	315	165	130	95	10.0	280/225	280	225	620	300	185	155	50.0
140/75	140	75	330	165	130	100	10.4	280/250	280	250	665	315	185	185	55.0
140/90	140	90	345	175	130	105	11.0	280/280	280	280	665	315	185	185	58.0
140/110	140	110	365	185	130	115	10.8	315/90	315	90	480	265	190	105	32.6
140/125	140	125	370	205	130	125	12.7	315/110	315	110	545	275	190	115	37.3
140/140	140	140	390	195	130	130	13.3	315/140	315	140	540	290	190	130	42.5
160/63	160	63	335	175	145	95	14.0	315/160	315	160	595	295	190	145	52.0
160/75	160	75	350	175	145	100	11.2	315/200	315	200	620	305	190	155	59.0
160/90	160	90	365	185	145	105	15.6	315/225	315	225	610	345	190	175	61.0
160/110	160	110	385	195	145	115	16.3	315/250	315	250	670	325	190	175	63.0
160/125	160	125	385	200	145	125	13.8	315/280	315	280	665	355	190	185	64.2
160/140	160	140	410	205	145	130	15.0	315/315	315	315	745	350	190	190	74.0
160/160	160	160	435	215	145	145	21.0	355/110	355	110	570	290	205	115	49.3
200/75	200	75	390	210	155	100	16.2	355/160	355	160	600	315	205	145	53.9
200/90	200	90	420	205	155	105	18.5	355/200	355	200	630	340	205	155	58.9
200/110	200	110	440	215	155	115	21.0	355/315	355	315	740	385	205	190	70.1
200/125	200	125	440	220	155	125	18.6	355/355	355	355	780	390	205	205	75.1
200/140	200	140	465	225	155	130	26.5	400/200	400	200	680	370	230	155	71.0
200/160	200	160	490	235	155	145	30.0	400/315	400	315	790	410	230	190	83.6
200/180	200	180	510	260	155	155	31.0	400/400	400	400	880	440	230	230	95.7




MOPVC双承口单支盘三通

MOPVC DOUBLE SOCKET TEE WITH FLANGED BRANCH

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 钻孔标准/Drilling Spec:
EN1092-2
- 6 PVC管用管件标准/Standard:
EN12842

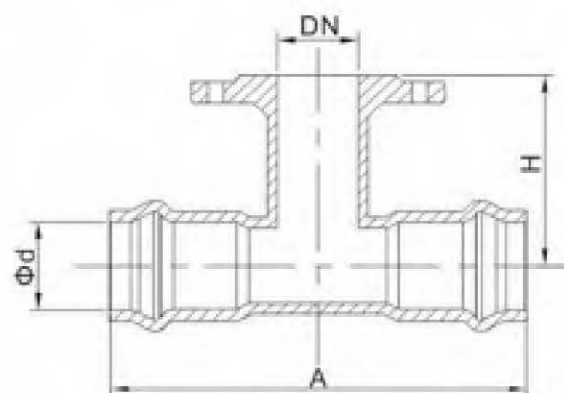

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR
3	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

规格/DIMENSIONS (PN16)

SIZE	DN	Ød	A	H	P/kg
50/40	40	50	240	90	4.6
63/40	40	63	250	140	4.7
63/50	50	63	250	140	6.5
63/60	60	63	250	140	5.8
63/65	65	63	250	140	6.5
75/40	40	75	240	130	6.5
75/50	50	75	250	140	6.4
75/60	60	75	265	140	7.7
75/65	65	75	265	140	7.6
75/80	80	75	265	140	10
90/40	40	90	265	135	7.6
90/50	50	90	275	145	8.6
90/60	60	90	290	155	9.4
90/65	65	90	290	155	9.5
90/80	80	90	305	160	11.0
110/40	40	110	285	145	9.4
110/50	50	110	295	145	9.9
110/60	60	110	310	165	10.5
110/65	65	110	310	165	10.7
110/80	80	110	325	170	12.2
110/100	100	110	345	170	14.9
125/40	40	125	295	160	12.2
125/50	50	125	330	160	13.0
125/60	60	125	320	160	13.5
125/80	80	125	335	170	14.4
125/100	100	125	355	180	17.8
125/125	125	125	380	180	19.3
140/40	40	140	305	160	13.2
140/50	50	140	320	160	13.5
140/60	140	60	330	180	14.2
140/65	140	65	335	200	14.3
140/80	80	140	345	185	14.5
140/100	100	140	365	195	14.7
140/125	125	140	390	200	19.0
160/40	40	160	325	170	17.1
160/50	50	160	360	200	17.2
160/60	60	160	350	190	17.4
160/65	65	160	365	215	17.5
160/80	80	160	365	200	17.8
160/100	100	160	385	205	18.7
160/125	125	160	410	210	19.0
160/150	150	160	435	220	25.0
180/60	60	180	410	210	17.3
180/100	100	180	450	210	20.5
180/150	150	180	500	220	26.0
180/200	200	180	550	240	31.6
200/40	40	200	380	195	20.8
200/50	50	200	390	195	21.7
200/60	60	200	405	215	22.0
200/80	80	200	420	225	25.0
200/100	100	200	440	230	27.0

规格/DIMENSIONS (PN16)

SIZE	DN	Ød	A	H	P/kg
200/125	125	200	465	240	28.4
200/150	150	200	490	245	34.0
200/200	200	200	540	250	36.5
225/60	60	225	425	215	24.6
225/80	80	225	440	225	26.5
225/100	100	225	460	230	27.8
225/125	125	225	485	240	28.4
225/150	150	225	510	245	35.0
225/200	200	225	560	260	33.9
250/60	60	250	460	250	33.1
250/80	80	250	475	250	35.1
250/100	100	250	495	255	42.2
250/125	125	250	520	260	36.4
250/150	150	250	545	265	46.0
250/200	200	250	595	275	55.6
250/250	250	250	645	285	57.4
280/80	80	280	470	280	32.0
280/100	100	280	490	290	36.5
280/150	150	280	540	285	41.0
280/200	200	280	590	290	62.1
280/250	250	280	640	305	73.2
315/80	80	315	525	295	59.5
315/100	100	315	545	300	61.0
315/150	150	315	595	310	64.0
315/200	200	315	645	310	70.8
315/250	250	315	695	310	73.0
315/300	300	315	745	310	81.3
355/80	80	355	550	305	51.2
355/100	100	355	570	310	53.9
355/150	150	355	620	330	61.6
355/200	200	355	670	330	69.9
355/250	250	355	720	330	79.2
355/300	300	355	770	330	85.8
355/350	300	355	820	350	119.7
400/80	80	400	580	350	70.0
400/100	100	400	580	350	75.6
400/150	150	400	630	350	92.0
400/200	200	400	680	350	95.0
400/250	250	400	720	350	109.5
400/300	300	400	780	350	123.5
400/400	400	400	880	360	162.0
450/80	80	450	560	340	64.4
450/100	100	450	580	355	67.7
450/150	150	450	630	360	77.0
450/200	200	450	680	365	84.2
450/400	400	450	880	395	126.5
500/80	80	500	188	386	112.32
500/100	100	500	208	386	118.8
500/200	200	500	302	395	135.0
500/300	300	500	406	410	163.0
500/400	400	500	612	430	183.6




MOPVC承口管堵


MOPVC END CAP

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 PVC管用管件标准/Standard:
EN12842



带螺旋纹连接的管堵
Caps threaded branch



管堵
Caps

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR
3	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

管堵 Caps

规格/DIMENSION (PN16)				
Ød	A	L	P/kg	
50	80	100	0.7	
63	90	110	1.3	
75	90	115	1.7	
90	100	125	2.2	
110	110	135	3.1	
125	115	145	4.5	
140	120	150	4.9	
160	130	160	6.5	
200	140	175	9.2	
225	150	185	12.0	
250	160	195	15.6	
280	170	205	22.0	
315	185	220	24.7	

带螺旋纹连接的管堵 Caps threaded branch

规格/DIMENSION (PN16)				
Ød	R	A	L	P/kg
50	1"	110	90	1.1
63	1"	115	95	1.5
75	1"	125	100	2.0
90	1"	130	105	2.7
110	2"	140	115	3.5
125	2"	165	125	4.2
140	2"	160	130	5.0
160	2"	175	145	6.0
180	2"	190	155	7.5
200	2"	190	155	9.0
225	2"	190	155	11.0
250	2"	205	175	14.4
280	2"	225	185	17.6
315	2"	225	190	20.7






MOPVC双承口渐缩管

MOPVC DOUBLE SOCKET REDUCED TAPPER

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 PVC管用管样标准/Standard:
EN12842

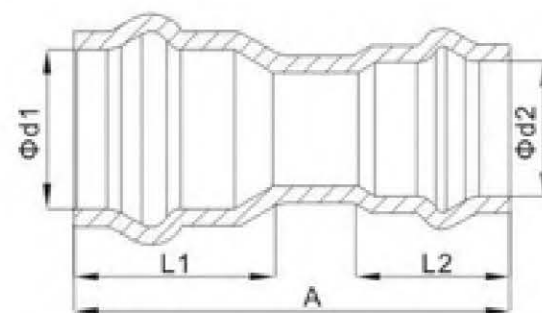

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR
3	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

规格/DIMENSIONS (PN16)							规格/DIMENSIONS (PN16)						
SIZE	$\Phi d1$	$\Phi d2$	A	L1	L2	P/kg	SIZE	$\Phi d1$	$\Phi d2$	A	L1	L2	P/kg
63/50	63	50	190	95	90	1.7	225/90	225	90	340	155	105	14.8
75/63	75	63	200	100	95	3.2	225/110	225	110	345	155	115	15.5
90/63	90	63	215	105	95	3.4	225/140	225	140	325	155	130	16.0
90/75	90	75	215	105	100	4.0	225/160	225	160	340	155	145	17.0
110/63	110	63	235	115	95	4.2	225/200	225	200	350	155	155	17.2
110/75	110	75	235	115	100	4.5	250/110	250	110	360	175	115	17.0
110/90	110	90	240	115	105	5.5	250/140	250	140	360	170	135	14.0
125/63	125	63	280	125	95	3.8	250/160	250	160	380	175	145	19.2
125/90	125	90	260	125	105	6.5	250/200	250	200	380	175	155	20.0
125/110	125	110	265	125	115	7.0	250/225	250	225	400	175	155	22.0
140/90	140	90	275	130	105	5.5	280/160	280	160	400	185	145	24.0
140/110	140	110	270	130	115	7.3	280/225	280	225	400	185	155	26.0
140/125	140	125	275	130	125	8.5	280/250	280	250	420	185	175	27.7
160/63	160	63	285	145	95	8.5	315/110	315	110	410	190	155	24.0
160/75	160	75	285	145	100	8.7	315/160	315	160	420	190	155	29.0
160/90	160	90	285	145	105	8.9	315/200	315	200	430	190	155	27.5
160/110	160	110	285	145	115	9.3	315/225	315	225	400	190	155	30.5
160/125	160	125	285	145	125	9.5	315/250	315	250	435	190	175	30.0
160/140	160	140	290	145	130	10.6	355/250	355	250	430	205	175	33.0
200/90	200	90	310	155	105	10.4	355/315	355	315	450	205	190	33.2
200/110	200	110	330	155	115	13.5	400/250	400	250	480	230	175	40.3
200/140	200	140	330	155	130	14.0	400/315	400	315	480	230	190	42.5
200/160	200	160	340	155	145	14.5	400/355	400	355	500	230	205	46.0






MOPVC全承四通

MOPVC ALL SOCKET CROSS

技术参数 SPECIFICATION

- 1 测试标准/Type Test: EN14525/BS8561
- 2 橡胶标准/Elastomeric: EN681-2
- 3 球墨铸铁/Ductile Iron: EN1563 EN-GJS-450-10
- 4 涂层标准/Coating: WIS4-52-01
- 5 PVC管件标准/Standard: EN12842

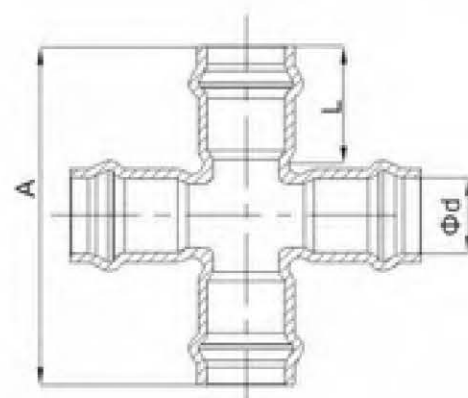

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR
3	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

规格/DIMENSION (PN16)

Ød	A	L	P/kg
75	305	95	6.0
90	340	100	8.5
110	380	105	9.9
160	450	135	23.3
200	588	150	43.0
250	624	170	46.3
315	700	190	68.0

WRAS
APPROVED MATERIALS
1112500-0003508




球墨铸铁11.25°法兰弯管

DUCTILE IRON DOUBLED FLANGED BEND-11.25°

技术参数 SPECIFICATION

- 1 测试标准/Type Test: EN14525/BS8561
- 2 橡胶标准/Elastomeric: EN681-2
- 3 球墨铸铁/Ductile Iron: EN1563 EN-GJS-450-10
- 4 涂层标准/Coating: WIS4-52-01
- 5 球墨铸铁管管件标准/Standard: EN545/ISO2531
- 6 钻孔标准/Drilling Spec: EN1092-2

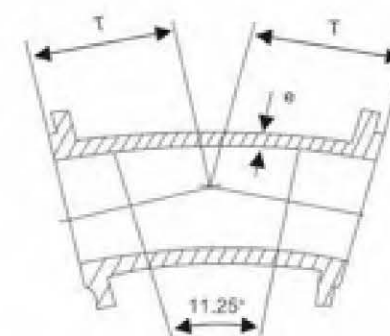

规格DIMENSIONS(PN16)

DN	E	T	重量/Mass		
			PN 10	PN 16	PN 25
80	7	130	9.5	9.5	9.5
100	7.2	140	11.5	11.5	12.5
150	7.8	160	19.1	19.1	21.0
200	8.4	180	29.9	29	32.0
250	9	350	55.9	56	64.0
300	9.6	400	79.3	79	90.0
350	10.2	298	79.0	84	100.4
400	10.8	324	100	109	131
450	11.4	349	123	139	166
500	12	375	152	179	201
600	13.2	426	222	269	299
700	14.4	478	313	336	-
800	15.6	529	426	455	-
900	16.8	581	546	584	-
1000	18	632	704	773	-
1100	19.2	683	882	952	-
1200	20.4	735	1094	1204	-
1400	22.8	835	1560	1674	-
1500	24	885	1849	2025	-
1600	25.2	940	2203	2382	-
1800	27.6	345	1258	1566	-
2000	30	375	1694	1970	-

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR



球墨铸铁22.5°双盘弯管


DUCTILE IRON DOUBLE FLANGED BEND-22.5°

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 球墨铸铁管用管件标准/Standard:
EN545/ISO2531
- 6 钻孔标准/Drilling Spec:
EN1092-2

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封垫/Seals	EPDM/NBR

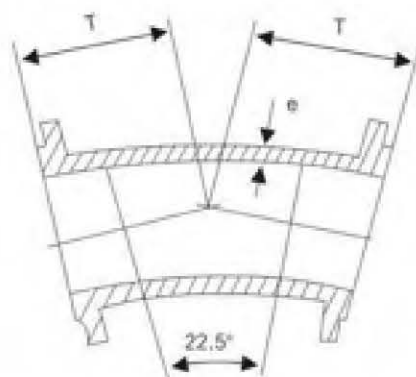

规格DIMENSIONS(PN16)					
DN	E	T	重量/Mass		
			PN 10	PN 16	PN 25
80	7.0	130	9.4	9.4	9.4
100	7.2	140	11.5	11.5	12.5
150	7.8	160	18.7	18.7	21.0
200	8.4	180	27.9	28	32.0
250	9.0	350	55.9	56	63.0
300	9.6	400	78.8	78.8	89.0
350	10.2	298	77.3	84	99.9
400	10.8	324	96.7	109	131
450	11.4	349	122	138	166
500	12.0	375	146	178	199.8
600	13.2	426	215.2	268	296.6
700	14.4	478	311	334	-
800	15.6	529	423	453	-
900	16.8	581	543	599.2	-
1000	18.0	632	700	769	-
1100	19.2	683	877	947	-
1200	20.4	735	1088	1198	-
1400	22.8	835	1551	1832	-
1500	24.0	880	1838	2014	-
1600	25.2	845	2180	2369	-
1800	27.6	480	1640	1864	-
2000	30.0	520	2081	2357	-



球墨铸铁45°双盘弯管


DUCTILE IRON DOUBLED FLANGE BEND-45°

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 球墨铸铁管用管件标准/Standard:
EN545/ISO2531
- 6 钻孔标准/Drilling Spec:
EN1092-2

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封垫/Seals	EPDM/NBR

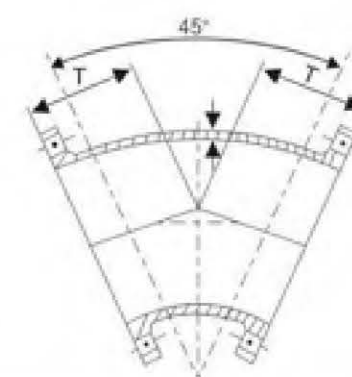

规格DIMENSIONS(PN16)					
DN	E	T	重量/Mass		
			PN 10	PN 16	PN 25
80	7.0	130	9.3	9.3	9.3
100	7.2	140	11.3	11.3	12.4
150	7.8	160	18.5	18.5	20.5
200	8.4	180	27.5	27	31.0
250	9.0	350	55	54	62.0
300	9.6	400	78	77	88.0
350	10.2	300	76	83	89.0
400	10.8	325	96	107	129
450	11.4	350	120	135	157
500	12.0	375	145	175	198
600	13.2	425	212	266	294
700	14.4	480	296	326	-
800	15.6	530	403	442	-
900	16.8	580	519	567	-
1000	18.0	630	668	751	-
1100	19.2	695	857	927	-
1200	20.4	750	1050	1178	-
1400	22.8	775	1412	1524	-
1500	24.0	810	1677	1853	-
1600	25.2	845	1915	2119	-
1800	27.6	910	2465	2717	-
2000	30.0	980	3149	3455	-



球墨铸铁90°双盘弯管


DUCTILE IRON DOUBLE FLANGED BEND-90°

技术参数 SPECIFICATION

- 1 测试标准/Type Test: EN14525/BS8561
- 2 橡胶标准/Elastomeric: EN681-2
- 3 球墨铸铁/Ductile Iron: EN1563 EN-GJS-450-10
- 4 涂层标准/Coating: WIS4-52-01
- 5 球墨铸铁管管件标准/Standard: EN545/ISO2531
- 6 钻孔标准/Drilling Spec: EN1092-2

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR

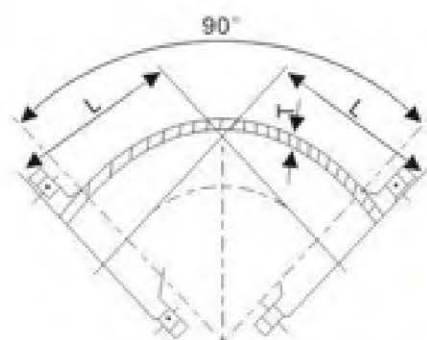

规格DIMENSIONS(PN16)

DN	T	L	90°弯管 90°Bends		
			重量/Mass		
			PN 10	PN 16	PN 25
80	7.0	165	9.6	9.6	9.6
100	7.2	180	11.9	11.9	12.9
150	7.8	220	20.0	20.0	22.0
200	8.4	260	30.5	30.5	34.5
250	9.0	350	50.0	50.0	57.0
300	9.6	400	70.0	70.0	81.0
350	10.2	450	90.0	96.0	113
400	10.8	500	117	127	149
450	11.4	550	147	163	184
500	12.0	600	184	211	235
600	13.2	700	272	325	353
700	14.4	800	399	429	-
800	15.6	900	552	590	-
900	16.8	1000	768	770	-
1000	18.0	1100	937	1020	-
1100	19.2	1200	1164	1234	-
1200	20.4	1300	1452	1562	-
1400	22.8	1350	1948	2062	-
1500	24.0	1400	2273	2449	-
1600	25.2	1450	2663	2841	-
1800	27.6	1500	3348	3572	-



球墨铸铁90°鸭掌弯管


DUCTILE IRON DOUBLE FLANGED DUCKFOOT BEND-90°

技术参数 SPECIFICATION

- 1 测试标准/Type Test: EN14525/BS8561
- 2 球墨铸铁/Ductile Iron: EN1563 EN-GJS-450-10
- 3 涂层标准/Coating: WIS4-52-01
- 4 球墨铸铁管管件标准/Standard: EN545/ISO2531
- 5 钻孔标准/Drilling Spec: EN1092-2

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron

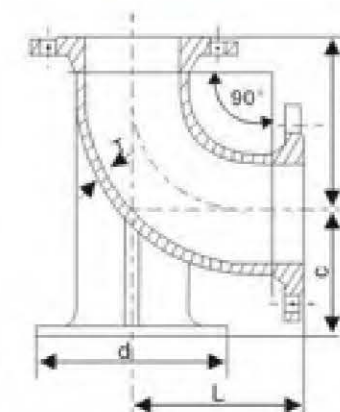

规格DIMENSIONS(PN16)

DN	L	C	d	90°鸭掌弯管 90°DuckfootBends		
				重量/Mass		
				PN 10	PN 16	PN 25
80	165	110	180	14.1	14.1	14.8
100	180	125	200	17.3	17.8	19.2
150	220	160	250	30.0	30.0	32.0
200	260	190	300	46.5	46.0	52.5
250	350	225	350	75.0	75.0	82.0
300	400	255	400	106	106	116
350	450	290	450	139	145	162
400	500	320	500	178	189	212
450	550	355	550	245	261	283
500	600	385	600	283	313	337
600	700	450	700	428	481	509
700	800	515	800	700	780	683
800	900	580	900	846	974	1000
900	1000	645	1000	1152	1290	1411
1000	1100	710	1100	1698	1770	1854
1100	1200	776	1200	2080	2150	-
1200	1300	840	1300	2599	2709	2908




球墨铸铁11.25°双承弯管

DUCTILE IRON DOUBLE SOCKET/SOCKET SPIGOT BEND-11.25°

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 球墨铸铁管用管件标准/Standard:
EN545/ISO2531

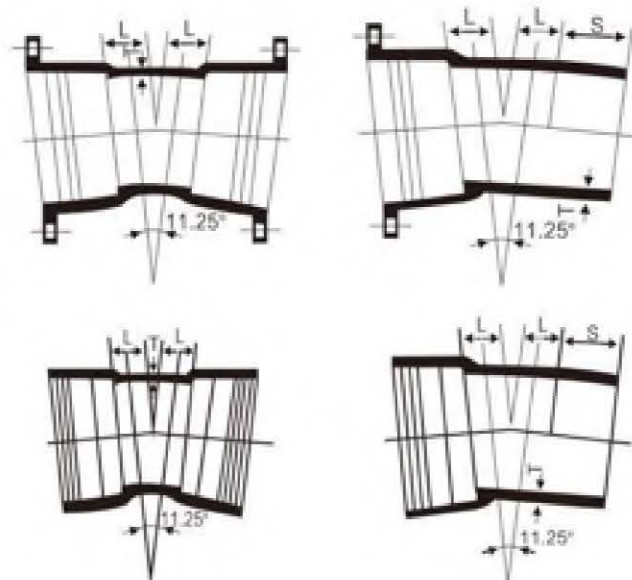

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR

规格DIMENSIONS(PN16)

DN	T	L	S	重量/Mass			
				双承口/Double-socket		承插口/Socket-spigot	
				T	K	T	K
80	7.0	30	150	7.1	10.5	7.4	7.4
100	7.2	30	150	8.9	13.1	9.4	11.7
150	7.8	35	200	14.8	21.5	16.0	17.1
200	8.4	40	200	22.0	29.0	23.2	25.4
250	9.0	50	200	30.5	37.5	32.2	33.6
300	9.6	55	200	40.5	54.0	42.2	47.6
350	10.2	60	200	52.0	65.5	53.2	58.5
400	10.8	65	200	65.0	79.0	70.5	75.7
450	11.4	70	200	91.9	93.5	97.0	101
500	12.0	75	200	96.0	108	102	104
600	13.2	85	200	134	141	138	136
700	14.4	95	200	216	187	216	209
800	15.6	110	200	286	234	286	263
900	16.8	120	250	374	297	374	359
1000	18.0	130	250	473	375	473	431
1100	19.2	140	250	525	442	515	596
1200	20.4	150	250	724	524	724	613
1400	22.8	130	300	1047	697	1047	985
1500	24.0	140	300	1204	794	1100	1080
1600	25.2	140	300	1134	914	1135	1134
1800	27.6	155	380	-	1200	-	1549
2000	33.0	165	380	-	1522	-	1985






球墨铸铁22.5°双承弯管

DUCTILE IRON DOUBLE SOCKET/SOCKET SPIGOT BEND-22.5°

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 球墨铸铁管用管件标准/Standard:
EN545/ISO2531

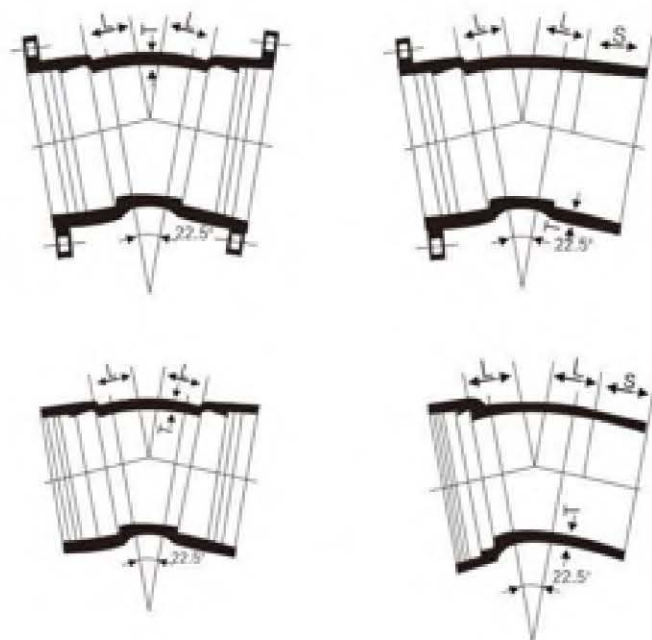

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR

规格DIMENSIONS(PN16)

DN	T	L	S	重量/Mass			
				双承口/Double-socket		承插口/Socket-spigot	
				T	K	T	K
80	7.0	40	160	7.5	10.7	7.7	7.6
100	7.2	40	150	9.5	13.5	9.8	12.2
150	7.8	55	200	15.9	22.5	16.8	19.3
200	8.4	65	200	24.0	30.5	25.2	27.4
250	9.0	75	200	33.5	40.5	35.2	36.6
300	9.6	85	200	44.5	58.0	46.2	51.6
350	10.2	95	200	58.0	71.0	59.0	34.2
400	10.8	110	200	74.0	88.0	79.5	84.7
450	11.4	120	200	102	105	107	111
500	12.0	130	200	111	123	117	119
600	13.2	150	200	157	164	161	159
700	14.4	175	200	248	223	248	240
800	15.6	195	200	331	281	331	308
900	16.8	220	250	432	364	432	417
1000	18.0	240	250	550	463	550	508
1100	19.2	260	250	637	560	628	515
1200	20.4	285	250	851	671	851	740
1400	22.8	260	300	1241	882	1241	1179
1500	24.0	270	300	1627	1011	-	965
1600	25.2	280	300	1659	1167	-	1377
1800	27.6	305	380	1663	1533	-	1837
2000	30.0	330	380	2144	1965	-	2373






球墨铸铁45°承口弯管

DUCTILE IRON DOUBLE SOCKET/SOCKET SPIGOT BEND-45°

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 球墨铸铁管用管件标准/Standard:
EN545/ISO2531

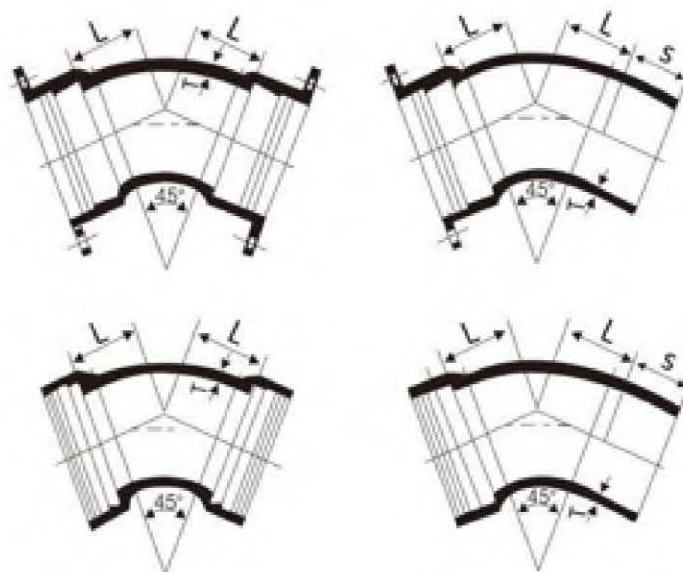

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR

规格DIMENSIONS(PN16)

DN	T	L	S	重量/Mass			
				双承口/Double-socket		承插口/Socket-spigot	
				T	K	T	K
80	7.0	55	150	7.7	11.1	8.1	8.0
100	7.2	65	150	10.1	14.3	10.6	13.0
150	7.8	85	200	17.4	24.0	18.2	20.7
200	8.4	110	200	27.0	34.0	28.2	30.4
250	9.0	130	200	38.5	45.5	40.2	41.6
300	9.6	150	200	53.0	66.0	54.6	42.9
350	10.2	175	200	70.0	83.5	71.3	76.5
400	10.8	195	200	89.0	104	89.9	95.1
450	11.4	220	200	123	127	125	129
500	12.0	240	200	139	150	139	142
600	13.2	285	200	202	209	200	198
700	14.4	330	200	310	289	310	302
800	15.6	370	200	418	373	418	395
900	16.8	415	250	554	488	554	539
1000	18.0	460	250	710	629	710	708
1100	19.2	505	250	856	772	781	726
1200	20.4	550	250	1109	943	1109	1098
1400	22.8	515	300	1632	1223	1632	1632
1500	24.0	540	300	1444	1444	1956	1533
1600	25.2	565	300	1693	1693	1640	1693
1800	27.6	610	380	2296	2222	—	2222
2000	30.0	660	380	2970	3020	—	3020






球墨铸铁90°承口弯管

DUCTILE IRON DOUBLE SOCKET/SOCKET SPIGOT BEND-90°

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 球墨铸铁管用管件标准/Standard:
EN545/ISO2531

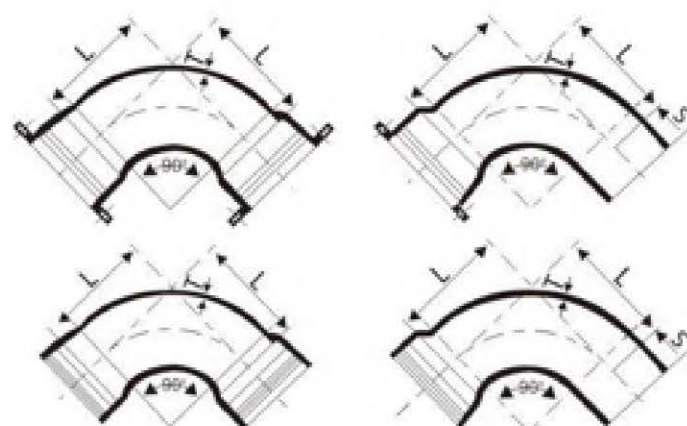

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR

规格DIMENSIONS(PN16)

DN	T	L	S	重量/Mass			
				双承口/Double-socket		承插口/Socket-spigot	
				T	K	T	K
80	7.0	100	150	8.6	12.0	9.0	8.9
100	7.2	120	150	11.5	15.6	11.9	14.3
150	7.8	170	200	20.5	27.5	21.4	23.9
200	8.4	220	200	33.0	40.0	34.2	36.4
250	9.0	270	200	48.5	55.5	54.1	57.6
300	9.6	320	200	68.0	81.5	69.6	75.0
350	10.2	370	200	97.5	105	99.7	105
400	10.8	420	200	129	134	130	135
450	11.4	470	200	163	166	165	169
500	12.0	520	200	204	202	205	208
600	13.2	620	200	303	290	301	299
700	14.4	720	200	455	408	436	428
800	15.6	820	200	605	544	595	572
900	16.8	920	250	813	720	793	778
1000	18.0	1020	250	1045	935	986.4	986
1100	19.2	1120	250	1418	1168	1177.6	1122
1200	20.4	1220	250	1663	1444	1624	1613
1400	22.8	1220	300	2419	1918	2419	2419
1500	24.0	1270	300	2588	2230	2207	2184
1600	25.2	1290	330	3014	2543	2526	2887
1800	27.6	1320	330	3833	3229	—	3649
2000	30.0	1360	400	4783	4033	—	4567





球墨铸铁全承口三通

DUCTILE IRON ALL SOCKET TEE

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 球墨铸铁管管件标准/Standard:
EN545/ISO2531

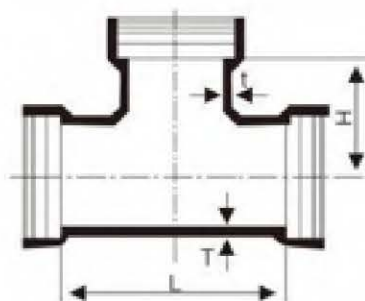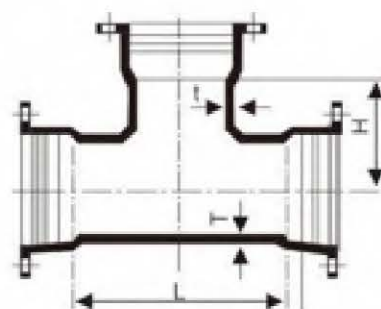

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR

规格DIMENSIONS(PN16)

Dn×dn	T	L	T	H	重量/Mass	
					T	K
80×80	7.0	170	7.0	85	12.5	17.7
100×80	7.2	170	7.0	95	14.3	21.5
100×100	7.2	190	7.2	95	16.1	23.5
150×80	7.8	170	7.0	120	21.5	29.5
150×100	7.8	195	7.2	120	23.5	31
150×150	7.8	256	7.8	125	23	35.6
200×80	8.4	175	7.0	145	30	37.9
200×100	8.4	200	7.2	145	32	38.8
200×150	8.4	255	7.8	150	37	45
200×200	8.4	315	8.4	155	48	50.5
250×80	9.0	200	7.0	210	40	48.6
250×100	9.0	200	7.2	215	47.8	49
250×150	9.0	255	7.8	220	59	61
250×200	9.0	315	8.4	225	63.5	65.5
250×250	9.0	375	7.0	230	71.5	73.5
300×100	9.6	205	7.2	236	54.5	66.5
300×150	9.6	280	7.8	240	63	80.5
300×200	9.6	320	8.4	245	72	84.5
300×250	9.6	375	9.0	250	80	92.1
300×300	9.6	435	9.6	260	91	106
350×100	10.2	205	7.2	260	71	78
350×150	10.2	260	7.8	265	87	95
350×200	10.2	325	8.4	270	91	98
350×250	10.2	375	9.0	275	97	109
350×300	10.2	435	9.6	285	111	122
350×350	10.2	495	10.2	290	124	133
400×100	10.8	210	7.2	285	83	92
400×150	10.8	205	7.8	290	101	111
400×200	10.8	325	8.4	295	105	114
400×250	10.8	375	9.0	300	116	128
400×300	10.8	435	9.6	310	127	140
400×350	10.8	495	10.2	315	137	152
400×400	10.8	560	10.8	320	155	167





球墨铸铁双承口单支盘三通

DUCTILE IRON DOUBLE SOCKET TEE WITH FLANGED BRANCH

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN581-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 球墨铸铁管用管件标准/Standard:
EN545/ISO2531

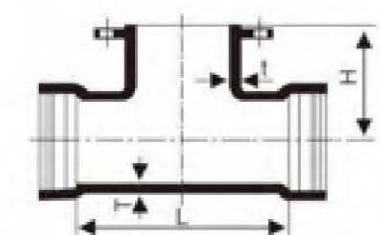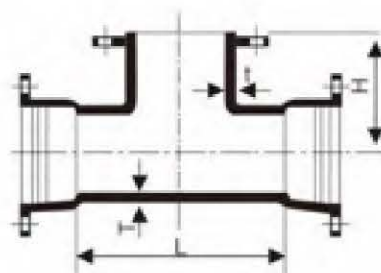

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR

规格DIMENSIONS(PN16)

DN×dn	T	L	t	H	重量/Mass					
					T			K		
					PN 10	PN 16	PN 25	PN 10	PN 16	PN 25
80x80	7.0	170	7.0	165.0	13.5	13.5	13.5	16.7	16.7	16.7
100x80	7.2	170	7.0	175.0	15.8	15.8	15.8	19.7	19.7	19.7
100x100	7.2	190	7.2	180.0	17.5	17.5	17.7	21.0	21.0	21.5
150x80	7.8	170	7.0	205.0	23.0	23.0	23.0	28.5	28.5	23.5
150x100	7.8	195	7.2	210.0	24.5	24.5	25.0	30.5	30.5	31.0
150x150	7.8	255	7.8	220.0	29.5	29.5	30.5	35.5	35.5	36.5
200x80	8.4	175	7.0	235.0	31.5	31.5	31.5	36.5	36.5	36.5
200x100	8.4	200	7.2	240.0	33.5	33.5	34.0	38.5	38.5	39.0
200x150	8.4	255	7.8	250.0	39.0	39.0	40.0	44.5	44.5	45.5
200x200	8.4	315	8.4	260.0	45.6	46.0	47.5	51.5	51.0	53.0
250x80	9.0	200	7.0	270.0	44.0	44.0	44.0	47.0	47.0	47.0
250x100	9.0	200	7.2	270.0	45.0	45.0	47.0	48.0	48.0	48.5
250x150	9.0	255	7.8	280.0	57.0	57.0	57.6	59.0	59.0	60.0
250x200	9.0	315	8.4	290.0	59.0	59.0	59.0	62.5	62.0	64.0
250x250	9.0	375	9.0	300.0	65.0	66.0	69.0	71.0	71.0	74.6
300x100	9.6	205	7.2	300.0	55.0	55.0	56.0	65.0	65.0	65.5
300x150	9.8	260	7.8	310.0	69.0	69.0	69.0	78.5	78.5	79.5
300x200	9.6	320	8.4	320.0	70.0	71.0	73.0	81.5	81.5	83.5
300x250	9.6	375	9.0	330.0	83.0	81.0	85.0	94.0	91.0	96.0
300x300	9.6	435	9.6	340.0	89.0	91.0	95.0	102.0	102.0	107.0
350x100	10.2	205	7.2	330.0	68.0	71.0	71.5	76.5	76.5	77.0
350x150	10.2	260	7.8	340.0	87.5	87.5	88.0	93.0	93.0	94.0
350x200	10.2	325	8.4	350.0	90.5	90.5	89.5	96.0	96.0	98.0
350x250	10.2	375	9.0	360.0	103.0	114.0	125.0	114.0	118.0	135.0
350x300	10.2	435	9.6	370.0	113.0	118.0	129.0	118.0	124.0	123.0
350x350	10.2	495	10.2	330.0	117.0	120.0	132.0	129.0	132.0	139.0
400x100	10.8	210	7.2	360.0	83.0	83.0	83.0	91.0	91.0	91.5
400x150	10.8	265	7.8	370.0	102.0	102.0	103.0	109.0	109.0	110.0
400x200	10.8	325	8.4	380.0	112.0	112.0	114.0	113.0	113.0	114.0
400x250	10.8	375	9.0	390.0	119.0	119.0	122.0	127.0	128.0	132.0
400x300	10.8	435	9.6	400.0	129.0	131.0	137.0	137.0	142.0	156.0
400x350	10.8	495	10.2	410.0	143.0	146.0	153.0	153.0	163.0	167.0
400x400	10.8	560	10.8	420.0	150.0	156.0	167.0	163.0	178.0	186.0





球墨铸铁承插口单支盘三通

DUCTILE IRON SOCKET-SPIGOT TEE WITH FLANGED BRANCH

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 橡胶标准/Elastomeric:
EN681-2
- 3 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 4 涂层标准/Coating:
WIS4-52-01
- 5 球墨铸铁管用管件标准/Standard:
EN545/ISO2531

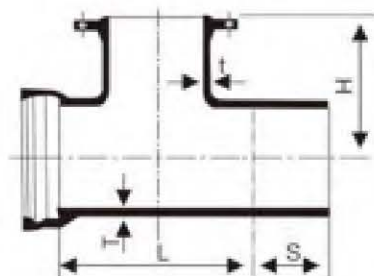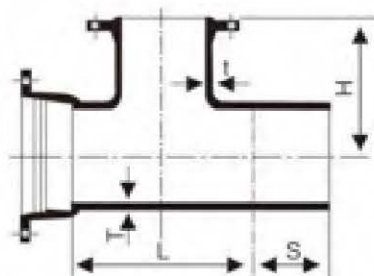

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR

规格DIMENSIONS(PN16)

Dnxdn	T	L	t	H	S	重量/Mass					
						T			K		
						PN 10	PN 16	PN 25	PN 10	PN 16	PN 25
80x80	7.0	170	7.0	165.0	150.0	14.0	14.0	14.0	13.9	13.9	13.9
100x80	7.2	170	7.2	170.0	150.0	16.4	16.4	16.4	18.7	18.7	18.7
100x100	7.2	190	7.2	180.0	150.0	17.8	17.8	17.8	20.1	20.1	20.1
150x80	7.8	170	7.0	205.0	200.0	23.7	23.7	24.0	26.1	26.1	27
150x100	7.8	195	7.2	210.0	200.0	25.4	25.4	25.4	27.0	27.6	27.5
150x150	7.8	255	7.8	220.0	200.0	30.2	30.2	30.2	32.0	32.2	33
200x80	8.4	175	7.0	235.0	200.0	32.5	32.5	32.5	32.7	34.5	32.7
200x100	8.4	200	7.2	240.0	200.0	34.3	34.3	34.3	34.7	36.3	36.3
200x150	8.4	255	7.8	250.0	200.0	40.2	40.2	40.2	40.7	42.2	41.7
200x200	8.4	315	8.4	280.0	200.0	46.6	47.0	47.0	47.7	48.6	49.2
250x80	9.0	200	7.0	270.0	200.0	43.4	43.4	45.1	44.8	44.8	44.8
250x100	9.0	200	7.2	270.0	200.0	44.9	44.9	48.0	46.4	46.4	46.4
250x150	9.0	255	7.8	280.0	200.0	57.3	57.3	57.1	54.3	58.7	59.0
250x200	9.0	315	8.4	290.0	200.0	57.7	57.7	58.1	57.8	59.1	59.3
250x250	9.0	375	9.0	300.0	200.0	65.7	66.3	67.1	66.8	68.1	69.3
300x100	9.6	205	7.2	300.0	200.0	52.0	52.5	58.5	62.9	63.9	64
300x150	9.6	280	7.8	310.0	200.0	70.9	71.9	66.5	73.3	87.3	88.0
300x200	9.6	320	8.4	320.0	200.0	73.5	82.5	70.0	78.9	87.9	89
300x250	9.6	375	9.0	330.0	200.0	85.5	93.5	91.5	90.5	90.5	95.5
300x300	9.6	435	9.6	340.0	200.0	91.9	105.0	92.0	97.3	110.0	113
350x100	10.2	205	7.2	330.0	200.0	70.2	70.2	63.6	75.2	75.2	76.0
350x150	10.2	260	7.8	340.0	200.0	85.2	85.2	84.1	90.0	90.2	90.2
350x200	10.2	325	8.4	350.0	200.0	89.6	91.0	91.6	92.7	92.7	93.0
350x250	10.2	375	9.0	380.0	200.0	106.0	116.0	117.0	106.0	106	107
350x300	10.2	435	9.5	370.0	200.0	114.0	120.0	122.0	122.0	124	124.0
350x350	10.2	495	10.2	380.0	200.0	121.0	123.0	125.0	125.0	127.0	130
400x100	10.8	210	7.2	380.0	200.0	84.2	84.2	76.9	89.2	89.2	90.0
400x150	10.8	265	7.8	370.0	200.0	99.8	99.8	96.9	104.0	104.0	104.0
400x200	10.8	325	8.4	380.0	200.0	105.0	104.0	108.0	109.0	108	110.0
400x250	10.8	375	9.0	390.0	200.0	120.0	120.0	123.0	125.0	125.0	129
400x300	10.8	435	9.6	400.0	200.0	134.0	135.0	137.0	138.0	138	139.0
400x350	10.8	495	10.2	410.0	200.0	144.0	148.0	155.0	148.0	151.0	160
400x400	10.8	560	10.8	420.0	200.0	151.0	157.0	161.0	156.0	162	167.0




球墨铸铁全盘四通

DUCTILE IRON ALL FLANGED CROSS

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 3 涂层标准/Coating:
WIS4-52-01
- 4 球墨铸铁管用管件标准/Standard:
EN545/ISO2531
- 5 钻孔标准/Drilling Spec:
EN1092-2

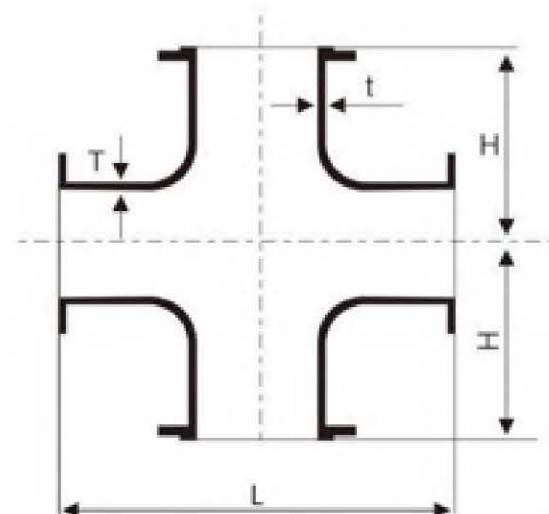

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron

规格DIMENSIONS(PN16)

Dn×dn	T	t	L	H	重量/Mass PN16
80X80	8.1	8.1	330	165	20.5
100X100	8.4	8.4	360	180	25.0
150X150	9.1	9.1	440	220	41.1
200X200	9.8	9.8	520	260	60.9
250X250	10.5	10.5	700	350	101
300X300	11.2	11.2	800	400	143
350X350	11.9	11.9	850	425	186
400X400	12.6	12.6	900	450	234
450X450	13.3	13.3	950	475	354
500X500	14.0	14.0	1000	500	359
600X600	15.4	15.4	1100	550	521






球墨铸铁全盘三通

DUCTILE IRON ALL FLANGE TREE

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 3 涂层标准/Coating:
WIS4-52-01
- 4 球墨铸铁管用管件标准/Standard:
EN545/ISO2531
- 5 钻孔标准/Drilling Spec:
EN1092-2

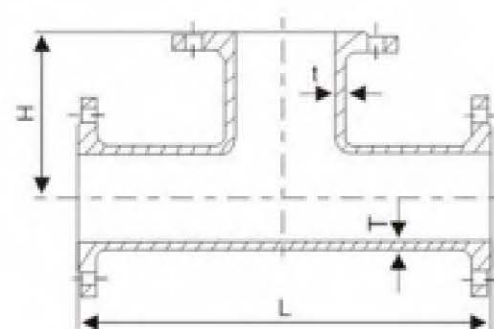

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron

规格DIMENSIONS(PN16)

DNxdn	T	L	t	H	重量/Mass		
					PN10	PN16	PN25
80x80	7.0	330	7.0	165	15.6	15.6	15.6
100x80	7.2	360	7.0	175	18.4	18.4	19.5
100x100	7.2	360	7.2	180	19.4	19.4	21
150x80	7.8	440	7.0	205	28.5	28.5	31
150x100	7.8	440	7.5	210	29.5	29.5	32
150x150	7.8	440	7.8	220	32.5	32.5	36
200x80	8.4	520	7.0	235	42	41.5	46
200x100	8.4	520	7.2	240	43	42	47.5
200x150	8.4	520	7.8	250	46	45.5	51
200x200	8.4	520	8.4	260	49.5	49	56
250x80	9.0	700	7.0	270	49.7	49.3	56.7
250x100	9.0	700	7.2	275	68	67	75
250x150	9.0	700	7.8	300	73.5	71	81
250x200	9.0	700	8.74	325	76	75	85
250x250	9.0	700	9.0	350	82	81	93
300x100	9.6	800	7.2	300	94	93	105
300x150	9.6	800	7.8	325	99	98.5	100
300x200	9.6	800	8.4	350	102	101	114
300x250	9.6	800	9.0	375	109	108	121
300x300	9.6	800	9.6	400	116	115	131
350x100	10.2	850	7.2	325	116	122	139
350x150	10.2	850	7.8	325	120	126	143
350x200	10.2	850	8.4	325	121	128	148
350x250	10.2	850	9.0	325	128	134	154
350x300	10.2	850	9.6	425	140	145	166
350x350	10.2	850	10.2	425	142	151	176
400x100	10.8	900	7.2	350	143	164	177
400x150	10.8	900	7.8	350	144	158	181
400x200	10.8	900	8.4	350	148	159	184
400x250	10.8	900	9.0	350	151	161	196
400x300	10.8	900	9.6	400	168	177	204
400x350	10.8	900	10.2	450	170	183	215
400x400	10.8	900	10.8	450	174	191	225




球墨铸铁法兰渐缩管

DUCTILE IRON FLANGE REDUCER

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 3 涂层标准/Coating:
WIS4-52-01
- 4 球墨铸铁管管件标准/Standard:
EN545/ISO2531
- 5 钻孔标准/Drilling Spec:
EN1092-2

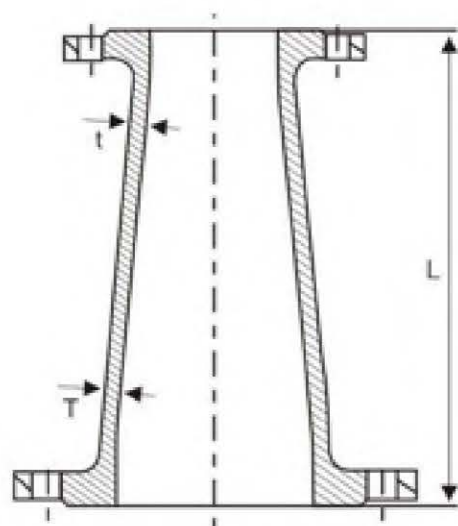

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron

规格DIMENSIONS(PN16)						
DNxdn	T	t	L	重量/Mass		
				PN10	PN16	PN25
100x80	7.2	7.0	200	9.3	9.3	9.3
150x80	7.8	7.0	400	16.4	16.4	17.4
150x100	7.8	7.2	300	15.3	15.3	16.8
200x100	8.4	7.2	600	27.5	27.5	30
200x150	8.4	7.8	300	22	21.5	31.5
250x150	9.0	7.8	600	39	39	43.5
250x200	9.0	8.4	300	30	29.5	35.5
300x150	9.6	7.8	650	48.5	48.5	55
300x200	9.6	8.4	600	52	51.5	59
300x250	9.6	9.0	300	40.5	39.5	49
350x200	10.2	8.4	650	61.5	64	74
350x250	10.2	9.0	600	65.5	67.5	79
350x300	10.2	9.6	300	49.5	52.5	66
400x200	10.8	8.4	700	73.5	77.5	90.5
400x250	10.8	9.0	650	77	81.5	96
400x300	10.8	9.6	600	80.5	85	101
400x350	10.8	10.2	300	58	67	86
450x250	11.4	9.0	700	89.5	97	112
450x300	11.4	9.6	650	93.5	101	117
450x350	11.4	10.2	600	95.6	106	126
450x400	11.4	10.8	300	70.5	83	105
500x300	12.0	9.6	700	109	122	138
500x350	12.0	10.2	650	111	127	145
500x400	12.0	10.8	600	110	130	153
500x450	12.0	11.4	300	83	104	126
600x350	13.2	10.2	750	147	174	193
600x400	13.2	10.8	700	150	178	201






球墨铸铁法兰短管


DUCTILE IRON FLANGE SHORT PIPE

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 3 涂层标准/Coating:
WIS4-52-01
- 4 球墨铸铁管用管件标准/Standard:
EN545/ISO2531
- 5 钻孔标准/Drilling Spec:
EN1092-2

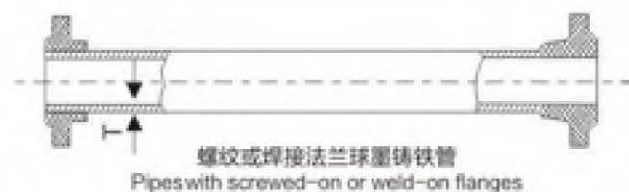

螺纹或焊接法兰球墨铸铁管
Pipes with screwed-on or weld-on flanges

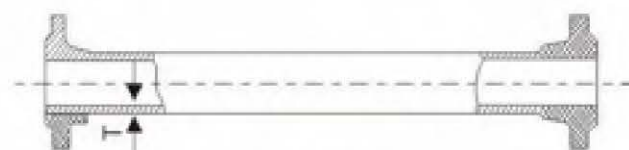

整体铸造法兰球墨铸铁管
Pipes with integrally cast flanges

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR

规格DIMENSIONS(PN16)

DN	管子重量/Pipe Mass				法兰重量/Flange mass					
	K=12		K=14		铸造法兰/Integral flange			螺栓连接法兰/Screwed-on or weld-on flange		
	T	Mass/m	T	Mass/m	Pn10	Pn16	Pn25	Pn10	Pn16	Pn25
80	7.0	14.1	8.1	16.1	2.9	2.9	2.9	3.5	3.5	3.5
100	7.2	17.7	8.4	20.4	3.3	3.3	3.8	4.0	4.0	4.5
125	7.5	22.7	8.8	26.4	4.0	4.0	4.6	5.0	5.0	5.6
150	7.8	28.0	9.1	32.4	4.9	4.9	5.9	6.1	6.1	7.1
200	8.4	39.7	9.8	46.1	6.8	6.6	8.7	8.5	8.3	10.4
250	9.0	52.8	10.5	61.3	9.6	9.2	13.1	11.8	11.4	15.3
300	9.6	67.3	11.2	78.1	12.8	12.4	18.0	15.6	15.2	20.8
350	10.2	83.1	11.9	96.5	14.1	17.2	25.5	17.6	20.7	29.0
400	10.8	100	12.6	116.2	16.3	21.9	33.2	20.5	26.1	37.4
450	11.4	118.3	13.3	137.5	20.2	28.1	39.0	-	32.7	-
500	12.0	138.2	14.0	160.6	21.8	37.0	48.7	27.6	42.8	54.5
600	13.2	181.8	15.4	211.3	30.8	57.3	71.5	38.4	64.9	79.1
700	14.4	230.8	16.8	268.4	40.5	55.6	-	50.2	65.3	-
800	15.6	285.5	18.2	332.1	54.8	74.0	-	66.7	85.9	-
900	16.8	345.4	19.6	401.7	64.3	88.2	-	78.7	102.6	-
1000	18.0	410.6	21	477.7	81.4	122.9	-	98.6	140.1	-
1100	19.2	481.7	22.4	560.4	112.8	147.8	-	-	-	-
1200	20.4	557.7	23.8	649	120.9	185.2	-	144.2	208.5	-
1400	22.8	726.8	26.6	845.7	147.8	215.2	-	178.2	246.3	-
1500	24.0	819.1	28	953.2	201.4	289.3	-	-	-	-
1600	25.2	916.9	29.4	1067	206.4	308.4	-	244.7	346.7	-
1800	27.6	1129.3	32.2	1314.2	236.3	362.2	-	283.5	409.4	-
2000	30.0	1363.4	35.0	1586.8	279.4	432.2	-	336.4	489.2	-






球墨铸铁螺纹法兰盘

DUCTILE IRON THREADED FLANGE

技术参数 SPECIFICATION

- 1 测试标准/Type Test:
EN14525/BS8561
- 2 球墨铸铁/Ductile Iron:
EN1563 EN-GJS-450-10
- 3 涂层标准/Coating:
WIS4-52-01
- 4 球墨铸铁管用管件标准/Standard:
EN545/ISO2531
- 5 钻孔标准/Drilling Spec:
EN1092-2

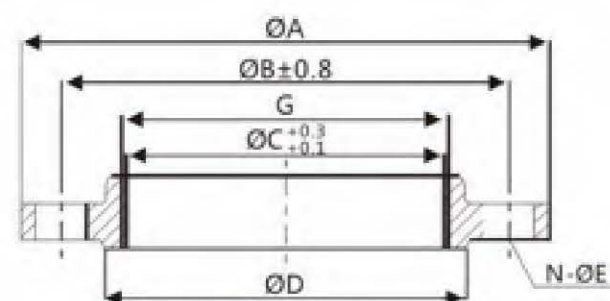

规格/DIMENSIONS (PN16)

DN	G	ØA	ØB	ØC	ØD	N	ØE
DN50	1"	165	125	30.3	99	4	19
DN50	1 1/4"	165	125	39	99	4	19
DN50	1 1/2"	165	125	44.9	99	4	19
DN50	1 3/4"	165	125	50.9	99	4	19
DN50	2"	165	125	56.7	99	4	19
DN65	1"	185	145	30.3	118	4	19
DN65	1 1/4"	185	145	39	118	4	19
DN65	1 1/2"	185	145	44.9	118	4	19
DN65	1 3/4"	185	145	50.9	118	4	19
DN65	2"	185	145	56.7	118	4	19
DN80	1"	200	160	30.3	132	8	19
DN80	1 1/4"	200	160	39	132	8	19
DN80	1 1/2"	200	160	44.9	132	8	19
DN80	1 3/4"	200	160	50.9	132	8	19
DN80	2"	200	160	56.7	132	8	19
DN80	2 1/2"	200	160	72.3	132	8	19
DN100	1"	220	180	30.3	156	8	19
DN100	1 1/4"	220	180	39	156	8	19
DN100	1 1/2"	220	180	44.9	156	8	19
DN100	1 3/4"	220	180	50.9	156	8	19
DN100	2"	220	180	56.7	156	8	19
DN100	2 1/2"	220	180	72.3	156	8	19
DN100	3"	220	180	85	156	8	19
DN100	3 1/2"	220	180	97.4	156	8	19
DN125	1"	250	210	30.3	184	8	19
DN125	1 1/4"	250	210	39	184	8	19
DN125	1 1/2"	250	210	44.9	184	8	19
DN125	1 3/4"	250	210	50.9	184	8	19
DN125	2"	250	210	56.7	184	8	19
DN125	2 1/2"	250	210	72.3	184	8	19
DN125	3"	250	210	85	184	8	19
DN125	3 1/2"	250	210	97.4	184	8	19
DN125	4"	250	210	110.1	184	8	19
DN125	4 1/2"	250	210	122.8	184	8	19
DN150	1"	285	240	30.3	211	8	23
DN150	1 1/4"	285	240	39	211	8	23
DN150	1 1/2"	285	240	44.9	211	8	23
DN150	1 3/4"	285	240	50.9	211	8	23
DN150	2"	285	240	56.7	211	8	23
DN150	2 1/2"	285	240	72.3	211	8	23
DN150	3"	285	240	85	211	8	23
DN150	3 1/2"	285	240	97.4	211	8	23
DN150	4"	285	240	110.1	211	8	23
DN150	4 1/2"	285	240	122.8	211	8	23
DN150	5"	285	240	135.5	211	8	23

规格/DIMENSIONS (PN16)

DN	G	ØA	ØB	ØC	ØD	N	ØE
DN200	1"	340	295	30.3	266	12	23
DN200	1 1/4"	340	295	39	266	12	23
DN200	1 1/2"	340	295	44.9	266	12	23
DN200	1 3/4"	340	295	50.9	266	12	23
DN200	2"	340	295	56.7	266	12	23
DN200	2 1/2"	340	295	72.3	266	12	23
DN200	3"	340	295	85	266	12	23
DN200	3 1/2"	340	295	97.4	266	12	23
DN200	4"	340	295	110.1	266	12	23
DN200	4 1/2"	340	295	122.8	266	12	23
DN200	5"	340	295	135.5	266	12	23
DN200	6"	340	295	160.9	266	12	23
DN250	1"	400	355	30.3	319	12	28
DN250	1 1/4"	400	355	39	319	12	28
DN250	1 1/2"	400	355	44.9	319	12	28
DN250	1 3/4"	400	355	50.9	319	12	28
DN250	2"	400	355	56.7	319	12	28
DN250	2 1/2"	400	355	72.3	319	12	28
DN250	3"	400	355	85	319	12	28
DN250	3 1/2"	400	355	97.4	319	12	28
DN250	4"	400	355	110.1	319	12	28
DN250	4 1/2"	400	355	122.8	319	12	28
DN250	5"	400	355	135.5	319	12	28
DN250	6"	400	355	160.9	319	12	28
DN300	1"	455	410	30.3	370	12	28
DN300	1 1/4"	455	410	39	370	12	28
DN300	1 1/2"	455	410	44.9	370	12	28
DN300	1 3/4"	455	410	50.9	370	12	28
DN300	2"	455	410	56.7	370	12	28
DN300	2 1/2"	455	410	72.3	370	12	28
DN300	3"	455	410	85	370	12	28
DN300	3 1/2"	455	410	97.4	370	12	28
DN300	4"	455	410	110.1	370	12	28
DN300	4 1/2"	455	410	122.8	370	12	28
DN300	5"	455	410	135.5	370	12	28
DN300	6"	455	410	160.9	370	12	28

更多型号，请联系销售团队

For more size, please contact our salesteam.



球墨铸铁井盖&雨水篦子

DUCTILE IRON MANHOLE COVER & GRATE




Model NO. -PA



Model NO. -PB



Model NO. -PC



Model NO. -PD

技术参数 SPECIFICATION

1. 材质/Material: 球墨铸铁/Ductile Iron QT500-7
2. 测试标准/Type Test: EN124

主要产品 MAIN PRODUCTS

1. 圆形井盖: MANHOLE COVER WITH FRAME
2. 方形井盖: FRAMES AND GRATES
3. 污水篦子: DRAINAGE GRATING

型号 Model	规格 Specification	有效载荷重量 Payload Weight	净孔 Clear Opening	重量 Weight
NO	mm	ton	mm	kg
PA-1	300×300×17	12.75	175	5.7
PA-2	400×400×25	12.75	280	10
PA-3	500×500×30	12.75	355	18.5
PA-4	600×600×30	12.75	430	25.5
PA-5	700×700×35	12.75	504	36.4
PA-6	800×800×35	12.75	616	54.5
PB-1	300×300×30	12.75	230×230	8.3
PB-2	400×400×31	12.75	330×330	12.9
PB-3	500×500×47	12.75	402×402	26.5
PB-4	600×600×49	12.75	500×500	37.3
PB-5	700×700×49	12.75	603×603	50.3
PB-6	800×800×51	12.75	707×707	68
PC-1	646×41	12.75	Ø583	26
PC-2	790×50	12.75	Ø640	38.5
PD-1	300×300×39	25.5	253×253	12.2
PD-2	400×400×41	25.5	351×351	21.3
PD-3	500×500×39	25.5	445×445	32



球墨铸铁井盖&雨水篦子

DUCTILE IRON MANHOLE COVER & GRATE



Model NO. -PI



Model NO. -PF



Model NO. -PG



Model NO. -PE



Model NO. -PK



Model NO. -PM



Model NO. -PL



Model NO. -PR



Model NO. -PQ



Model NO. -PO

技术参数 SPECIFICATION

1. 材质/Material: 球墨铸铁/Ductile Iron: QT500-7
2. 测试标准/Type Test: EN124

主要产品 MAIN PRODUCTS

1. 圆形井盖: MANHOLE COVER WITH FRAME
2. 方形井盖: FRAMES AND GRATES
3. 污水篦子: DRAINAGE GRATING

型号 Model	有效载荷重量 Payload Weight	规格 Specification	净孔 Clear Opening	重量 Weight
PE	(ton)	(mm)	(mm)	(kg)
PE-1	25.5	400×400×42	353×353	21.8
PE-2	25.5	500×500×39	448×448	34.1
PE-3	25.5	600×600×42	548×548	49.4
PE-4	25.5	700×700×44	645×645	75.5
PE-5	25.5	800×800×46	732×732	98.5

PI-1	40.8	Φ836×100	Φ611	64
PI-2	40.8	Φ810×75	Φ608	43

PK-1	12.75	300×300×30	200×200	7
PK-2	12.75	400×400×30	300×300	10
PK-3	12.75	500×500×35	385×385	17
PK-4	12.75	600×600×35	480×480	29
PK-5	12.75	700×700×40	585×585	42
PK-6	12.75	800×800×45	700×700	55

型号 Model	有效载荷重量 Payload Weight	规格 Specification	净孔 Clear Opening	重量 Weight
PE	(ton)	(mm)	(mm)	(kg)
PL-1	40.8	750×750×100	600	60
PL-2	40.8	850×850×100	600	67
PL-3	40.8	950×950×100	600	87
PM-1	40.8	850×100	600	60
PO-1	25.5	400×400×45	310×310	16
PO-2	25.5	500×500×50	405×405	24
PO-3	25.5	550×550×45	505×505	30
PO-4	25.5	600×600×55	495×495	36
PO-5	25.5	700×700×60	595×595	48
PQ-2	40.8	470×470×89	347×347	38
PQ-3	40.8	572×572×98	452×452	59
PR-360	25.5	360×360×156	Φ228	19.5
PR-460	25.5	460×460×160	Φ285	35

见证从前·展望未来...

PIPESOL

www.sinopipesol.com



WRAS
APPROVED MATERIALS
1112500 • 0903508