

borg&
overström



Distinctive
by design.

u2

borg& overström

High-performance hydration

Practical, reliable and visually striking, this innovative tap brings a high capacity refreshment solution to any commercial or Horeca environment.

Reasons to choose

- High capacity output
- Low energy consumption
- Compact under-counter unit
- Robust, solid build quality
- Simple to operate and maintain
- Simple-fit ventilation base included with S2

borgandoverstrom.com



Distinctive
by design.

u2

Water system



Direct Chill



Undercounter

Water options



Chilled



Ambient



Sparkling



Distinctive
by design.

Catering for capacity

The U2 boasts a compact yet high capacity under-counter appliance. It delivers a speedy throughput of 80 litres per hour at a consistent chilled temperature, making it the perfect solution for busy environments including Horeca applications.

Borg & Overström Totality®



Driven by a relentless pursuit of excellence, Borg & Overström Totality® is a research and development methodology for the advancement of hygiene, innovation and technology in refreshment systems.



Ultra-violet sterilising system
For added hygiene confidence, appliances can be fitted with Viovand™ – an ultra-violet sterilisation process that reduces water-born bacteria.



Laboratory certified 99.999% bacteria-reduced
Every Borg & Overström appliance undergoes an anti-microbial, antipathogen, sanitising procedure. The reassurance of hygienically safe appliances is provided by the unique bacteria-reducing process, Sterizen™.



World-class filtration
For the ultimate drinking experience, Borg & Overström appliances can be pre-fitted with a 3M filter to reduce sediment, chlorine, odours and scale.

Distinctive
by design.

U2 models

Power requirements
Hertz 50/Volts 230

Chilled temperature
Min 2°C/Max 10°C

Throughput litres per hour
S2 Chilled & Sparkling 80

Undercounter - S2
W330xD370xH362mm

**Water
system**

**Dispense
height**

**Max power
consumption**

**Stainless
Steel**

**Tap
style**

Chilled & Ambient

Dry Chill®

286mm

570W

601511

Twin Head
W150xD240xH470mm

Chilled & Sparkling

Dry Chill®

286mm

570W

601512

Twin Head
W150xD240xH470mm

Chilled, Ambient & Sparkling

Dry Chill®


286mm

570W

601513

Triple Head
W215xD240xH470mm

Distinctive
by design.

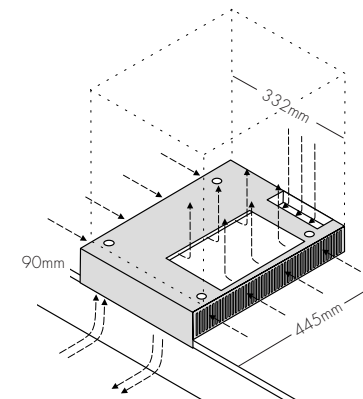

Simple-fit Ventilation Base

A refined and simple-to-install ventilation kit is included with the S2 system.

Additions for U2



Biodegradable paper cups
Environmentally-friendly disposable cups designed to fit Borg & Overström cup dispensers perfectly.



Personal drinking bottles
500ml capacity in black or grey frosted softtouch finish. Comes with quick-release leak-proof cap and carry strap.




750ml glass bottles
Suitable for dishwashers and bottlewashers. Perfect fit for the U2 tap. Stylish swing-top lid.



Deep Sparkle® CO² refills
Can be disposed via standard steel recycling or general waste. Requires CO² regulator with gauge.



Sanitisation kit
Six monthly sanitising cycles ensure appliances function at the optimum hygiene levels.



Optional drip trays
There is a range of integrated or freestanding stainless steel drip trays.



Waste kit overflow sensor
Featuring an audible high-water level alarm to prevent the waste tank from overflowing.



Install kit with 3M filter
Install appliances simply and effectively in a wide range of applications. Complete with a 3M filter.



Ultra-violet filter kit
Complete Vivandt™ filter kit to assist in water purification and removal of unwanted micro-organisms.



Mains waste kit
Mains waste kit connects the drip tray to the waste.

Distinctive
by design.

Book a visit to the Borg & Overström Academy
for a personal demonstration of the U2

Talk to an adviser
+44 (0) 1362 695 006
sales@borgandoverstrom.com