


Challenges in arsenic removal:

The World Health Organization believes that up to 200 million people are regularly consuming drinking water with unsafe concentrations of arsenic. Arsenic is now the top substance threatening human life, ahead of mercury and lead.

Objective Crystar® microfiltration:

Combined with oxidation and flocculation processes, Crystar® membranes provide a robust and stable mechanical barrier to remove arsenic precipitates down to the safety levels required.

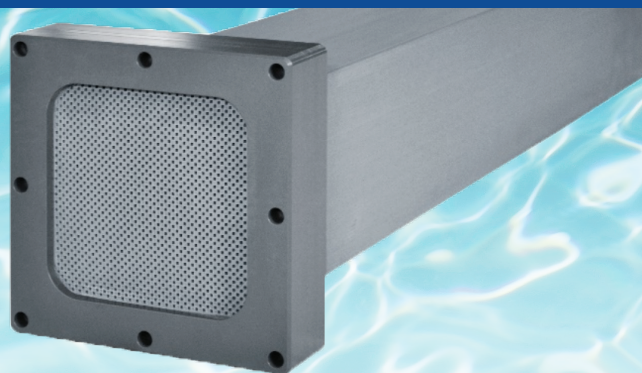

Products recommended:


- Crystar® FT HiPur

Feed Characteristics

- Turbidity: 80 - 100 NTU
- Total suspended solids: 55 - 75 ppm
- Arsenic content: 90 - 110 µg/l
- Pretreatment with NaOCl and FeCl₃

Result Summary

- Arsenic removal efficiency: 98% (permeate < 2 µg/liter)
- Iron removal efficiency: > 99.5%
- Filtrate flux: 500 - 600 LMH
- Water recovery rate: 97.8%

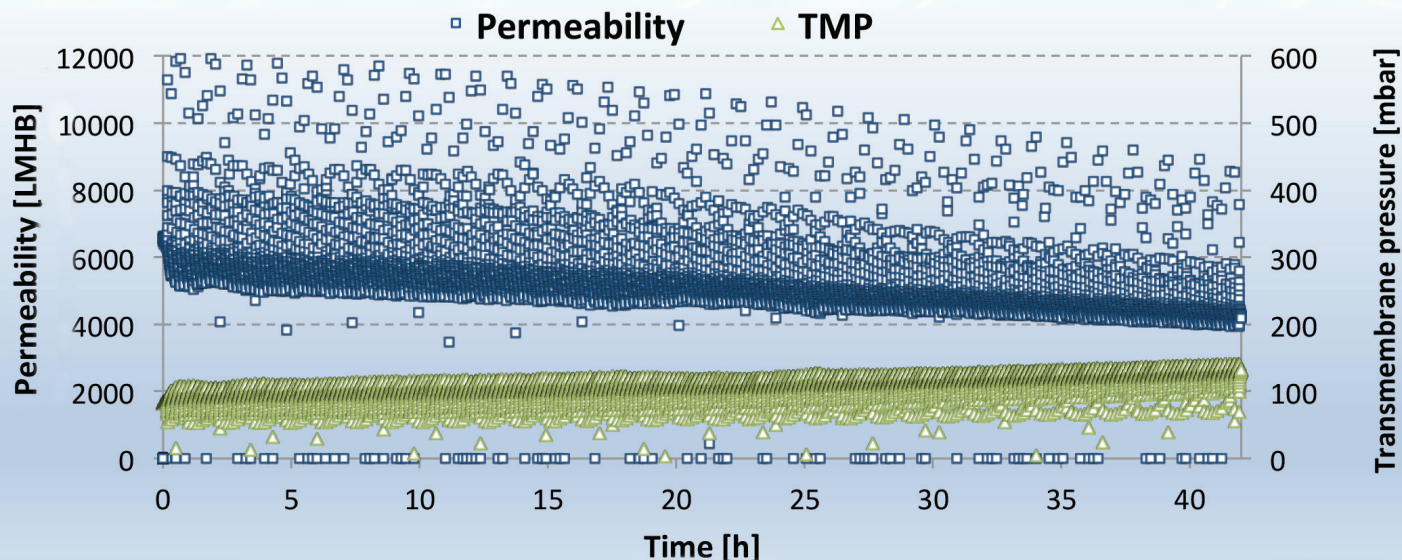

Main benefits of Crystar® FT:

- Excellent retention of metal oxides and hydroxides
- Compatibility with the use of aggressive oxidizing chemicals
- High permeate flux
- Low pressure/energy operation
- High water recovery

For more info visit: www.crystarfiltration.saint-gobain.com
Or email: crystarft@saint-gobain.com

The information contained in this document is believed to be accurate and reliable but is provided without guarantee or warranty on the part of Saint-Gobain IndustrieKeramik Rödental GmbH. Process parameters and requirements can impact typical values and test methods. Further, nothing present herein should be interpreted as an authorization or inducement to practice any patented invention without an appropriate license. Saint-Gobain IndustrieKeramik Rödental GmbH Terms and Conditions apply to all purchases.