


**FULL protection
of your water heater
and your thermal loop**

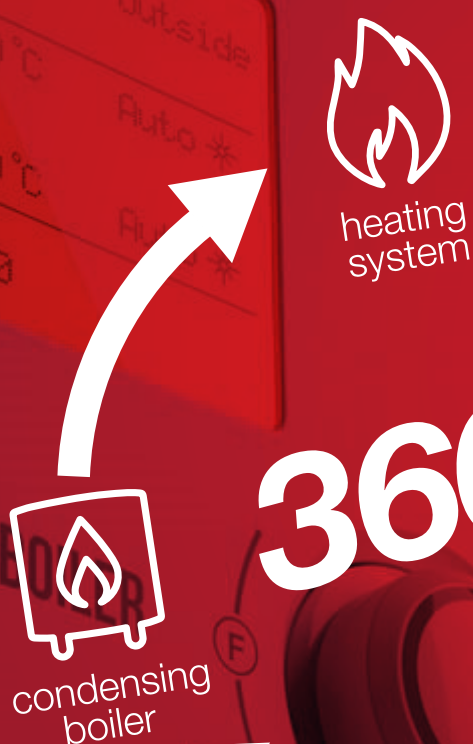

360°

hydraulic
circuit

+ efficiency

**+ longer life of your water
heater and your thermal loop**

**- maintenance
& servicing**

**- power
consumption**

KIT SALVACALDAIA

Boilerkit360
For the full protection of water heater and thermal loop

BOILERKIT360 A SERIES OF KITS



heating system



hydraulic circuit

FH kit

- FDM-1P

Magnetic sludge filter: STOP metallic sediments in heating loop.

FOR DOMESTIC BOILERS with maximum power up to 35KW

- HYDROPUL

Water filter for the removal of sediments.



heating system



hydraulic circuit

FDH kit

- FDM-1P

Magnetic sludge filter: STOP metallic sediments in heating loop.

FOR DOMESTIC BOILERS with maximum power up to 35KW

- DOSAPLUS 3 DG

Anti-scale conditioning for water heating system.

- HYDROPUL

Water filter for the removal of sediments.



heating system



hydraulic circuit

FD kit

- FDM-1P

Magnetic sludge filter: STOP metallic sediments in heating loop.

FOR DOMESTIC BOILERS with maximum power up to 35KW

- DOSAPLUS 3 DG

Anti-scale conditioning for water heating system.



heating system



hydraulic circuit



condensing boiler

FDN kit

- FDM-1P

Magnetic sludge filter: STOP metallic sediments in heating loop.

FOR DOMESTIC BOILERS with maximum power up to 35KW

- DOSAPLUS 2 3P DG

Anti-scale conditioning for water heating system.

- NEUTRAL MINI

Treatment of the acidic condensate for condensing boilers.

FOR DOMESTIC BOILERS with maximum power up to 35KW

USAGE & SOLUTION

■ FDM-1P



MAX. OPERATING PRESSURE:

3 bar (43 psi) at 90° C (194° F)



OPERATING TEMPERATURE:

4 (39,2° F) ÷ 90° C (194° F)

usage



**THERMAL LOOP
WATER HEATERS**



HOTWATER

solution



SEDIMENTS 500 mcr



METAL SLUDGE

■ DOSAPLUS 3 DG / DOSAPLUS 2 3P DG



MAX. OPERATING PRESSURE:

8 bar (116 PSI)



MAX. OPERATING TEMPERATURE:

45°C (113°F)

usage



**POU
POINT-OF-USE**



WATER HEATERS



COLDWATER

solution



ANTI-SCALE

■ HYDROPUL



MAX. OPERATING PRESSURE:

8 bar (116 PSI)



MAX. OPERATING TEMPERATURE:

45°C (113°F)

usage



**POE
POINT-OF-ENTRY**



COLDWATER

solution



SEDIMENTS 70 mcr

■ NEUTRAL MINI



MAX. OPERATING PRESSURE:

3 bar (43 psi)



MAX. OPERATING TEMPERATURE:

55°C (131°F)

usage



**CONDENSING
BOILER DRAINAGE**



COLDWATER

solution



**ACIDIC CONDENSATE
NEUTRALISING**

HYDROPUL

FDM-1P





NEUTRAL MINI

DOSAPLUS 3 DG

DOSAPLUS 2 3P DG



INSTALLATION SCHEME

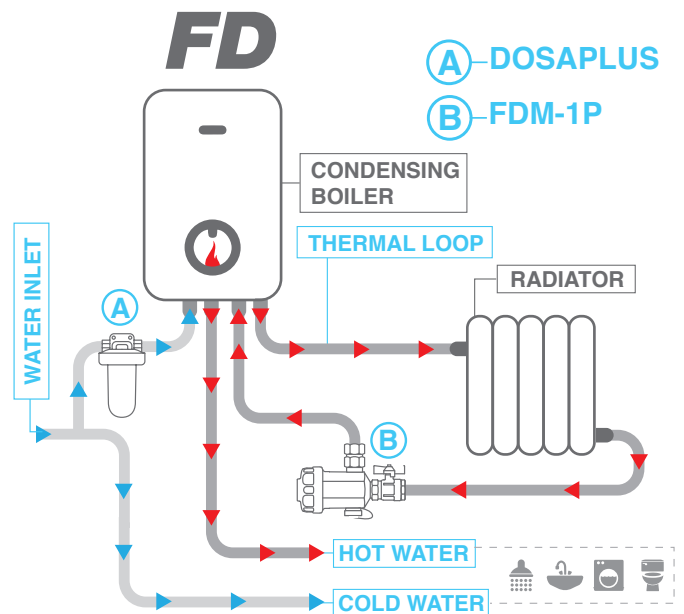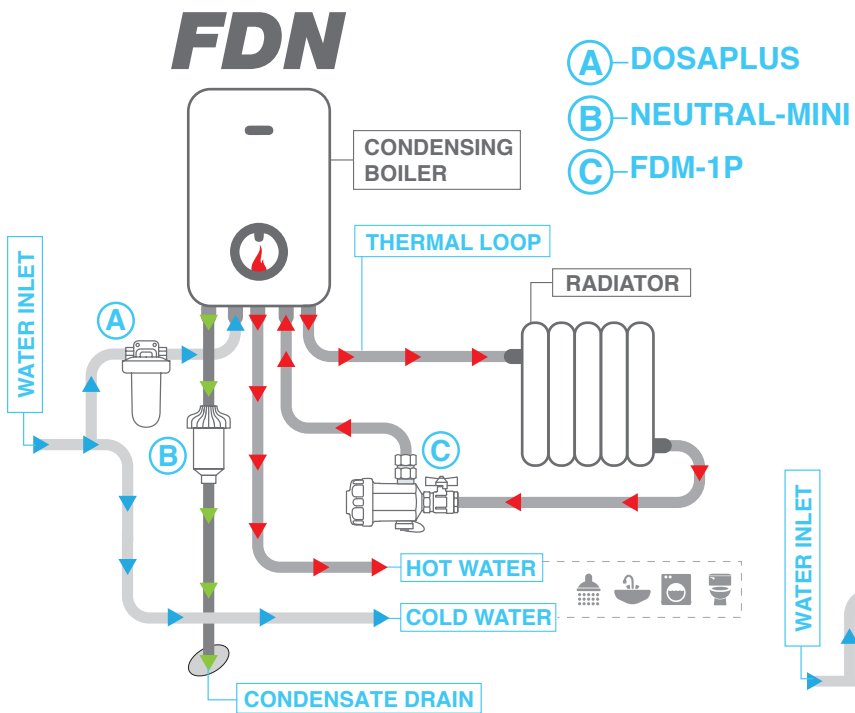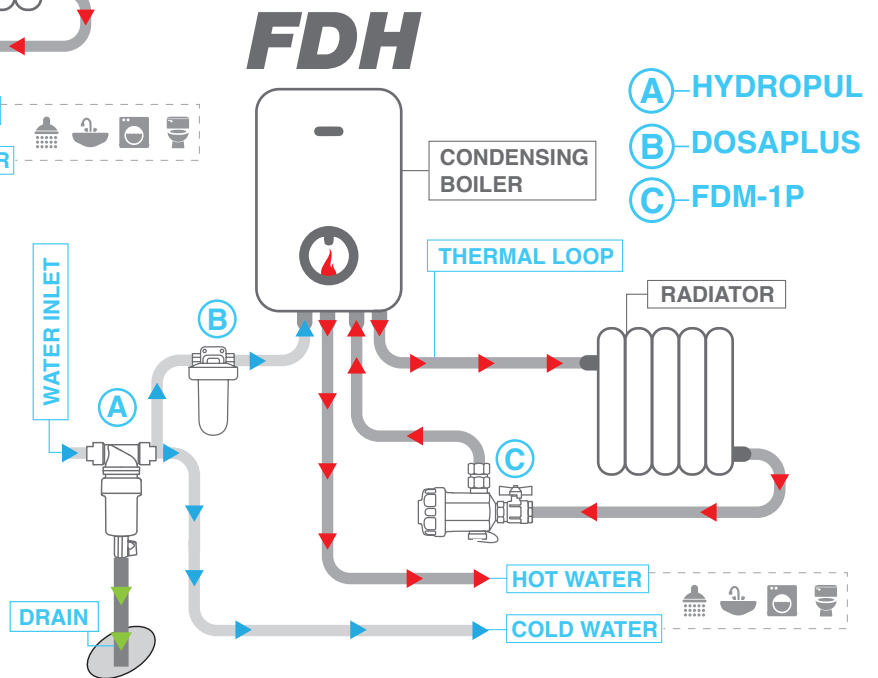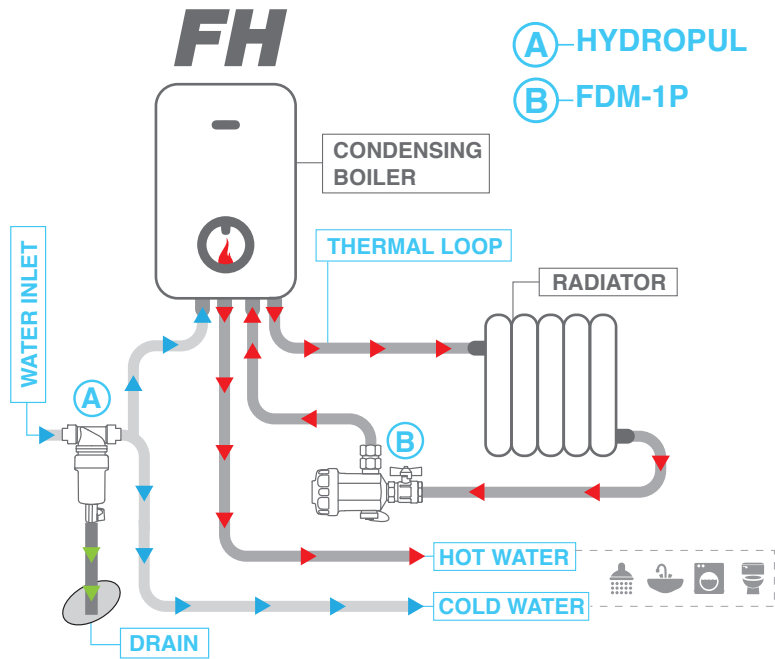


We value
what really
matters.
Water



MYATLAS
watercaremadeeasy



DOWNLOAD NOW!



IT'S MADE IN ITALY