

TECHNICAL SPECIFICATIONS

Inlet temperature: 5 – 35 °C

Max. TDS input: 1000 ppm

Working pressure:

- System with a pump: 1 to 3 Bar
- System without pump: 2,5 to 4,2 Bar

System with pump:

- Electrical voltage 220V – 24VDC
- LF-30L Pump

Safety devices:

- Protection valve
- Water stop system leak detection

3,2 gallon metallic storage tank

FILTRATION PROCESS

1st Stage:

5 µm PP sediments in-line cartridge (CA-9006-02)

2nd Stage:

Granular carbon in-line cartridge (CA-9006-04)

3rd Stage:

Granular carbon in-line cartridge (CA-9006-04)

4th Stage:

Membrane 18x12 75 GPD (ME-2003-03)

5th Stage:

10" Antibacterial nano-cloth post-filter (OI-0205-20)



Nora



www.fluxteurope.com



DISTRIBUTOR:

WILL NOT **DRINK**
WITHOUT IT

Nora



COMPACT REVERSE OSMOSIS
FOR WATER OF DOMESTIC USE

A SMALL INVESTMENT IN YOUR HEALTH AND WELL-BEING

Enjoying pure water at home is far less expensive than you could imagine. With a competitive price and a compact design which fits in any space, Nora is the reverse osmosis device perfect for you. The smart choice to supply your house with a low salt content water.

SAVING

Nora fulfils your expectations with an affordable price. The quality of the water supplied will prevent from future problems for your coffee machine and other household appliances.



PURITY

Low salt content water coming out from your faucet, as it removes between 96 to 97,5% of the dissolved salts.



COMFORT

So compact you will only notice its benefits: a high flow of the purest water just by opening the tap. In addition, the installation and maintenance are simple and without further costs.



HEALTH

You will not only notice a great improvement in the water's taste and quality straight away, but also its long term benefits for your body.

DESIGN

Its high capacity storage tank is perfectly integrated in its compact design, which allows it to be hidden inside your cupboards where other equipment would not fit.



TECHNOLOGY TO PRODUCE THE BEST WATER AT HOME



High water flow
Thanks to its 75 GDP membrane and 3/8" tubing.



High capacity storage tank
3.2 gallon water tank.




Safety system
Accurate and proven leak detection system WATER STOP and a pressure regulator for devices with a booster pump.



Antibacterial tubing
Prevents the proliferation of bacteria. Certified by SGS.



European certificate of conformity

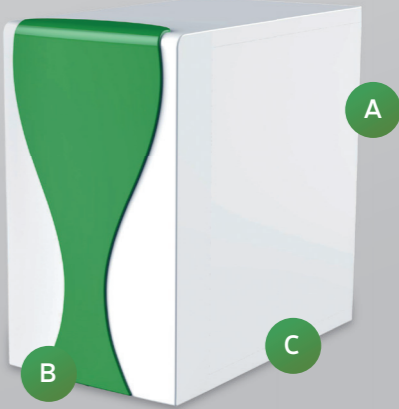

EQUIPMENT MEASUREMENTS

CODE	DIMENSIONS (mm)			WEIGHT	
	A	B	C	Net	Gross
RO-0240-01	420	250	430	10,5Kg	11,5Kg
RO-0240-03	420	250	430	13,5Kg	14,5Kg